
.....

<u>.</u>



The same of the sa

The state of the s



STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES

Technical Publication No. 49



HYDROLOGIC RECONNAISSANCE OF THE SOUTHERN UINTA BASIN, UTAH AND COLORADO

bу

Don Price and Louise L. Miller U.S. Geological Survey

Prepared by
the United State Geological Survey
in cooperation with
the Utah Department of Natural Resources
Division of Water Rights

CONTENTS

Pag
Abstract
Introduction
Well- and spring-numbering system
General hydrologic environment
Physiography and drainage
General geology
Climate
Vegetation
Water resources
Volume of precipitation
Surface water
- 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1
Imports
Ground water
Recharge
Occurrence
Movement
Storage
Estimated recoverable storage
Water-level fluctuations 30
Discharge
Seeps and springs
Evapotranspiration
Diffuse seepage to the Green, White, Duchesne,
and Strawberry Rivers
Wells
Summary of quantitative estimates
Chemical quality of water
Surface water
Ground water
Chemical quality in relation to use
Domestic and stock
Irrigation
Availability of water for future development,
Future studies
Selected references
Publications of the Utah Department of Natural Resources,
Division of Water Rights

ILLUSTRATIONS

[Plates are in pocket]

Plate	1.	Hydrogeologic map of the southern Uinta Basin.	
	2.	Generalized geologic section A-A' of part of the southern Uinta Basin.	
	3.	Map showing general chemical quality of water and location of sampling sites in the southern Uinta Basin.	
			Page
Figure	1.	Map showing location of the southern Uinta Basin.	4
	2.	Diagram showing well- and spring-numbering system used in Utah	6
	3.	Sketch showing major structural features in the Uinta Basin	8
	4.	Graph showing cumulative departure from average annual precipitation (1906-72) at Duchesne, Utah	11
	5.	Graph showing average monthly precipitation (1906-72) and average monthly temperature (1941-72) at Duchesne, Utah	13
	6.	Graph showing total annual runoff at two gaging stations	17
	7.	Graph showing average monthly runoff at selected gaging stations	18
	8.	Graph showing magnitude and frequency of annual peak discharges at three partial-record gaging stations	21
	9.	Sketch illustrating how water moves from streams to adjacent alluvial aquifers and is consumed by phreatophytes	26
:	10.	Graph showing depth to water level in well U(C-4-2)5bba-2 near Myton, Utah	30
-	11.	Diagram used to classify water for irrigation	42

TABLES

m -1 1 -	1	0 1 1/11 1 1 1 1 1 1 1 1 1 1 1	Page
Table	1.	General lithologic character and water-bearing properties of exposed geologic units	10
	2.	Number of days between last spring and first fall freeze at four stations	12
	3.	Estimated average annual precipitation and ground-water recharge from precipitation (1941-70)	15
	4.	Summary of streamflow records collected at selected stream-gaging stations	19
	5.	Annual peak discharges at three partial-record gaging stations for water years 1960-72	20
	6.	Estimated mean annual runoff at selected sites	23
	7.	Streamflow data collected along Willow Creek, September 27 and 28, 1972	24
	8.	Estimated consumptive use of water by phreato- phytes in nonirrigated areas	33
	9.	Summary of quantitative hydrologic estimates	36
1	10.	Records of selected water wells	50
.1	l1.	Selected drillers' logs of wells	52
1	12.	Records of selected springs	53
1	L3.	Selected chemical analyses of water from streams .	54
1	L4.	Chemical analyses of water from selected springs and water wells	56
1	.5.	Chemical analyses of water collected from oil and	5.Q

Metric units

Most numbers are given in this report in English units followed by metric units in parentheses. The conversion factors used are:

Engl:	ish		Metric		
Units	Abbreviation		Units	Abbreviation	
(Multiply)		(by)	(to obtain)		
		. '			
Acres	acre	0.4047	Square hectometres	hm²	
Acre-feet	acre-ft	.0012335	Cubic hectometres	hm ³	
Cubic-feet	ft³	.02832	Cubic metres	m ³	
Feet	ft	.3048	Metres	m	
Gallons	gal	3.7854	Litres	1	
		.0037854	Cubic metres	m ³	
Gallons per					
minute	gal/min	.06309	Litres per second	1/s	
Inches	in.	25.4	Millimetres	mm	
Miles	mi	1.6093	Kilometres	km	
Square miles	s mi²	2.59	Square kilometres	km ²	

Chemical concentration and water temperature are given only in metric units. Chemical concentration is given in milligrams per litre (mg/1). For concentrations less than 7,000 mg/1, the numerical value is about the same as for concentrations in mg/1 and the English unit, parts per million.

Chemical concentration in terms of ionic interacting values is given in milliequivalents per litre (meq/1). Meq/l is numerically equal to the English unit, equivalents per million.

Water temperature is given in degrees Celsius (°C), which can be converted to degrees Fahrenheit (°F) by the following equation: $^{\circ}F = 1.8(^{\circ}C) + 32$.

HYDROLOGIC RECONNAISSANCE OF THE SOUTHERN UINTA BASIN,

UTAH AND COLORADO

bу

Don Price and Louise L. Miller U.S. Geological Survey

ABSTRACT

The southern Uinta Basin covers about 4,900 square miles (12,690 $\rm km^2)$ in northeastern Utah and northwestern Colorado. For the most part, it is an arid to semiarid region; during the period 1941-70, average annual precipitation ranged from less than 8 inches (203 mm) in the north-central part to more than 26 inches (660 mm) in the extreme western part. The area is sparsely populated, averaging about one person for every 4.5 square miles (12 $\rm km^2)$. It is utilized mainly for livestock grazing and the production of oil and gas; the area is noted for its large reserves of oil shale.

The average annual volume of precipitation that fell on the southern Uinta Basin is estimated to have been about 3.1 million acrefeet $(3,800 \text{ hm}^3)$ during the period 1941-70. Net imports of water from the Duchesne River for irrigation within the southern Uinta Basin average about 70,000 acre-feet (86.3 hm^3) per year as of 1972.

About 94 percent of the average annual water supply from precipitation and imports is consumed within the southern Uinta Basin by evapotranspiration and sublimation from the winter snowpack. Phreatophytes along perennial and intermittent streams consume an estimated 204,000 acre-feet (252 $\,{\rm hm}^3)$ of water annually, and another 184,000 acre-feet (227 $\,{\rm hm}^3)$ is estimated to leave the area annually as surface and subsurface runoff and irrigation return flow.

Total recoverable ground water in storage in unconsolidated deposits and in the upper 100 feet (30.5 m) of saturated consolidated rocks is estimated to be on the order of 3.2 million acre-feet (3,947 hm³), with ground-water recharge providing an estimated average annual replenishable supply of about 120,000 acre-feet (148 hm³). Most of the ground water occurs in fine-grained sedimentary rocks and is generally yielded slowly to wells and springs--less than 50 gal/min (3.2 1/s)--in most places. The more highly permeable unconsolidated deposits beneath the alluvial plains of larger streams can yield more than 100 gal/min (6.3 1/s), but these deposits are thin and of small extent, containing only about 190,000 acre-feet (234 hm³) of recoverable water in storage.

Both the surface water and ground water are saline throughout a major part of the southern Uinta Basin. Only in the headwater areas along the south rim of that subbasin can fresh water generally be found. The concentration of dissolved solids in water from streams for which analyses were available ranges from less than 400 mg/l in headwater areas to more than 7,000 mg/l in the lower reaches of some streams. The concentration of dissolved solids in ground water for which analyses were available ranges from less than 200 mg/l from shallow aquifers in headwater areas to more than 100,000 mg/l in samples collected from deep oil tests.

The opportunity to develop large water supplies from sources within the southern Uinta Basin is limited by the generally poor chemical quality and uneven time and areal distribution of the water. The most promising opportunities for obtaining large sustained water supplies are surface reservoir storage of runoff in the headwaters of the larger streams, such as Willow Creek, or development of the alluvial aquifers adjacent to the larger streams, including the Green, White, and Duchesne Rivers.

INTRODUCTION

This report summarizes the findings of an investigation of the water resources of the southern Uinta Basin conducted by the U.S. Geological Survey in cooperation with the Utah Department of Natural Resources, Division of Water Rights. The purpose of the investigation was to evaluate the water resources of the southern Uinta Basin on a reconnaissance level and to provide information to assist in future planning and development of the water and related land resources.

The investigation was started in July 1971 and continued intermittently through December 1973. Most of the basic data used in the study were gathered from the files of the Geological Survey, the Division of Water Rights, and the Utah Division of Oil and Gas Conservation. Supplementary data on wells, springs, streamflow, and vegetation were collected in the field during five 3-5 day trips during the summer of 1971 and spring and summer of 1972. Much of the basic data collected for the investigation are included in tables 10-15.

A number of agencies provided assistance in obtaining data for the study. Personnel of the Utah Division of Oil and Gas Conservation assisted in obtaining ground-water quality data from oil and gas companies operating in the area; personnel of the U.S. Bureau of Land Management provided information about wells and springs on Bureau-administered land in the area; and personnel of the Ute Indian Tribe provided information about wells and springs on lands in the Uintah-Ouray Indian Reservation. The cooperation and assistance of these people, personnel of oil and gas companies who provided information, and all individual well and spring owners interviewed during the investigation is gratefully acknowledged.

The water resources of the southern Uinta Basin have received little previous study. Woolley (1930) and Thomas (1952) described the hydrology of the Green River, including the reach that passes through the Uinta Basin. Some hydrologic information about the area is included in a comprehensive study of the water resources of the Upper Colorado River Basin by Iorns and others (1964 and 1965). Feltis (1966) compiled some information about availability and chemical quality of water and briefly described the water-bearing properties of some of the geologic units in the Uinta Basin. Weir (1970) compiled considerable geohydrologic data collected from an oil-shale exploration well in the north-central part of the southern Uinta Basin.

The Uinta Basin includes about 10,000 square miles (25,900 km²) in northeastern Utah and northwestern Colorado. The area described in this report includes that part of the Uinta Basin that lies south of the Strawberry, Duchesne, and White Rivers in Utah and Colorado. It includes approximately 4,900 square miles (12,690 km²)—mostly in Duchesne and Uintah Counties, Utah, but also in parts of Carbon, Emery, Grand, Utah, and Wasatch Counties, Utah, and Garfield and Rio Blanco Counties, Colo. (See fig. 1.)

The southern Uinta Basin is sparsely populated, averaging about one person for every 4.5 square miles (12 km²). Most of the total estimated population (about 1,100 in 1972 as estimated from the 1970 U.S. Census) is concentrated along the Duchesne River between Duchesne and Myton. Probably less than 100 people reside in the remaining part of the southern Uinta Basin, which includes mostly Federal and Uintah-Ouray Indian Reservation land. However, the economy of such communities as Roosevelt and Vernal, Utah, which are in the northern Uinta Basin, and Rangely, Colo., is based partly on natural resources of the southern Uinta Basin.

The southern Uinta Basin is noted for its oil and gas production and its large reserves of oil shale. With the exception of exploration for and production of fossil fuels, the land is utilized almost exclusively for livestock grazing and recreation. There are about 26,000 acres (10,520 hm²) of irrigated cropland in the Duchesne-Myton-Pleasant Valley area, and the principal crops are meadowgrass, alfalfa, and small grains.

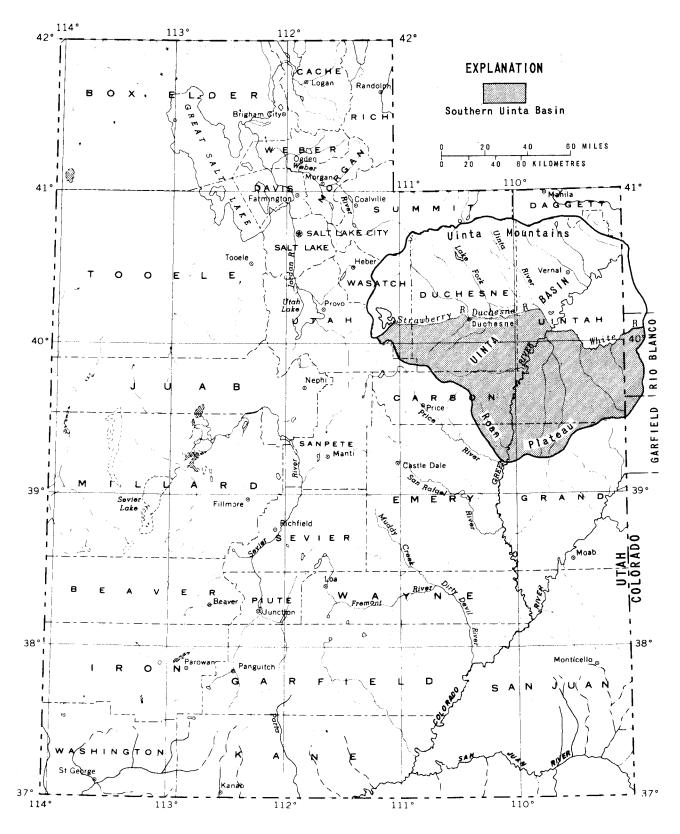


Figure 1. - Location of the southern Uinta Basin.

Well- and spring-numbering system

The system of numbering wells and springs in Utah is based on the cadastral land-survey system of the U.S. Government. The number, in addition to designating the well or spring, describes its position in the land net. By the land-survey system, the State is divided into four quadrants by the Salt Lake base line and meridian, and these quadrants are designated by the uppercase letters A, B, C, and D indicating the northeast, northwest, southwest, and southeast quadrants, respectively Numbers designating the township and range (in that order) follow the quadrant letter, and all three are enclosed in parentheses. The number after the parentheses indicates the section, and is followed by three letters indicating the quarter section, the quarter-quarter section, and the quarter-quarter-quarter section--generally 10 acres (4 hm²): the letters a, b, c, and d indicate, respectively, the northeast, northwest, southwest, and southeast quarters of each subdivision. number after the letters is the serial number of the well or spring within the 10-acre (4 hm²) tract; the letter "S" preceding the serial number denotes a spring. If a well or spring cannot be located within a 10-acre (4 $\mbox{hm}^2)$ tract, one or two location letters are used and the serial number is omitted. Thus, the number (D-9-17)21dca-1 designates the first well constructed or inventoried in the NE4SW4SE4 sec. 21, T. 9 S., R. 17 E., and the number (D-16-17)3c-S1 designates the first spring inventoried in the SW4 sec. 3, T. 16 S., R. 17 E., as related to the Salt Lake base line and meridian.

In the Uinta Basin, part of the "D" quadrant has been subdivided by the Uintah base line and meridian as shown in figure 2. Wells and springs in this land parcel are numbered in the same manner described above, but the numbers are preceded by the letter "U" to show that they are related to the Uintah base line and meridian. Thus well U(C-4-4) ldaa-1 is the first well constructed or inventoried in the NE4NE4SE4 sec. 1, T. 4 S., R. 4 W., Uintah base line and meridian.

 $^{^1}$ Although the basic land unit, the section, is theoretically a 1-mile (1.6 km) square, many sections are irregular. Such sections are subdivided into 10-acre (4 hm²) tracts, generally beginning at the southeast corner, and the surplus or shortage is taken up in the tracts along the north and west sides of the section.

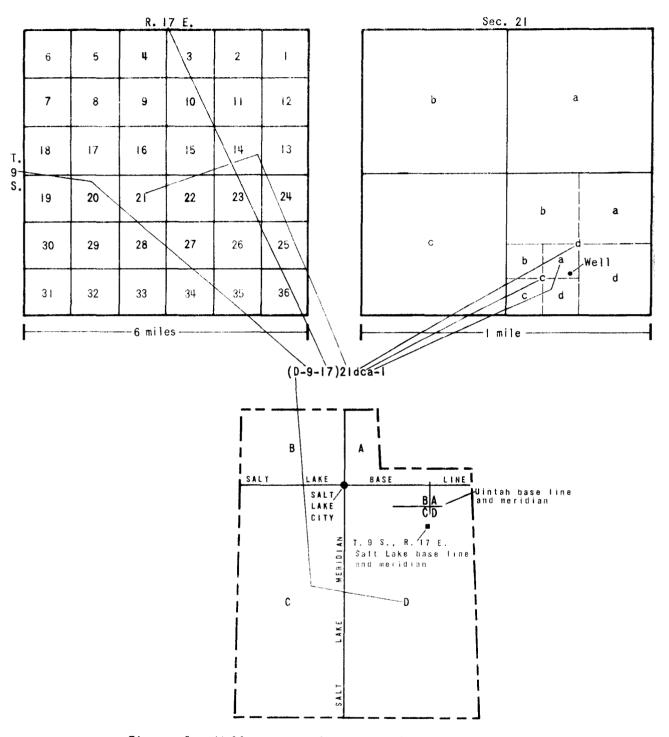


Figure 2.— Well- and spring-numbering system used in Utah.

GENERAL HYDROLOGIC ENVIRONMENT

Physiography and drainage

The Uinta Basin is in the Colorado Plateaus physiographic province (Fenneman and Johnson, 1946). It is a broad east-west trending structural basin bounded on the north by the lofty Uinta Mountains and on the south by the high Roan Plateau. The area of this report lies entirely on the south flank of the basin and is dissected into two nearly equal parts by the deeply incised southward-flowing Green River.

The surface of the southern Uinta Basin ascends rather uniformly from an altitude of about 4,700 feet (1,433 m) above mean sea level near the confluence of the Green, White, and Duchesne Rivers to more than 9,000 feet (2,743 m) along the crest of the Roan Plateau. Continuity of this surface is interrupted by deep narrow canyons of the Green River and its larger tributaries. The canyons have step-back walls whereby harder rock layers form vertical cliffs while the softer rock layers form gentle slopes. Maximum depths in the larger canyons exceed 1,000 feet (305 m), and the floors of even the largest canyons generally are less than half a mile (0.8 km) wide at their widest sections. Prominent mesas, benches, and flats, such as Flat Rock Mesa, Pariette Bench, and Wolf Flat dominate the interstream areas (pl. 1).

The lowest point in the southern Uinta Basin is about 4,200 feet (1,280 m) where the Green River crosses the south boundary; the highest point is about 10,285 feet (3,135 m) at Bruin Point, near the head of Range Creek $(p1.\ 1)$. Thus, total relief in the area is more than 6,000 feet (1,829 m).

The principal streams that originate in the southern Uinta Basin are consequent. Most of these streams flow generally northward. Exceptions include Nine Mile and Range Creeks and Pariette Draw, which flow generally eastward. All drainage is ultimately to the Green River, which is the largest tributary of the Colorado River.

General geology

The geology of the southern Uinta Basin has been intensely studied from the standpoint of its oil and gas production and evaluation of oil-shale reserves. Selected references that describe the geology of the southern Uinta Basin are given on pages 46-48.

The Uinta Basin is a large synclinal trough formed by the deformation of Tertiary and older rocks. The main axis of the syncline trends generally eastward and lies roughly 10 to 20 miles (16 to 32 km) north of the northern boundary of the southern Uinta Basin (fig. 3). Thus, the rock strata in the southern Uinta Basin dip generally to the north. Exposed rocks range in age from Cretaceous to Holocene but pre-Cretaceous rocks have been penetrated by oil and gas wells and tests. (See pl. 1).

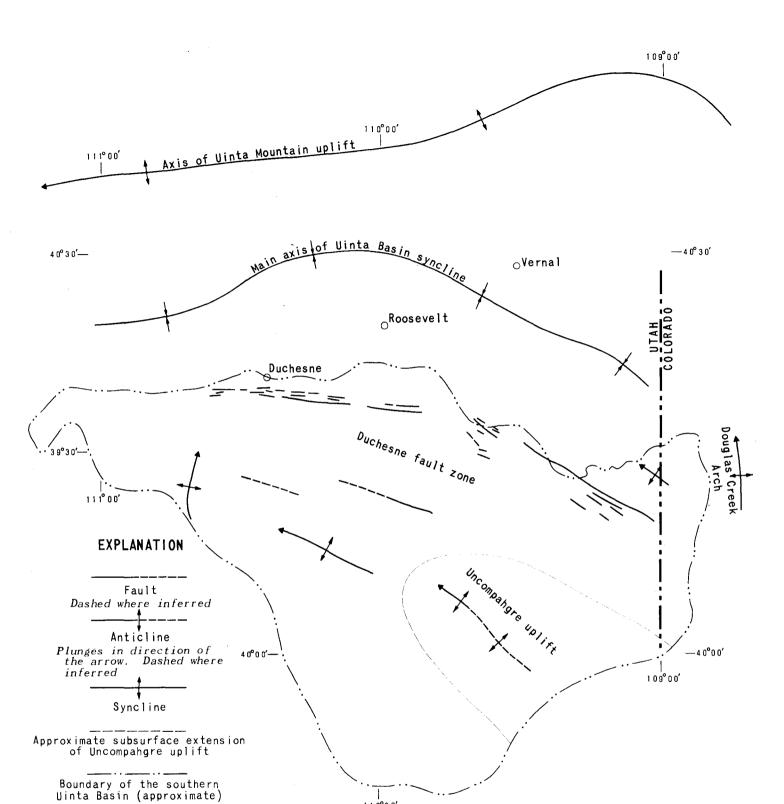


Figure 3.— Sketch showing major structural features in the Uinta Basin (after Ritzma, 1957).

2 0

30 KILOMETRES

30 MILES

110°00'

The general lithologic character and water-bearing properties of the geologic formations that are exposed in the southern Uinta Basin are given in table 1. Older rocks that are encountered in the subsurface are exposed along the south flank of the Uinta Mountains, a short distance to the north, or in the Book Cliffs, to the south. The general stratigraphic section of these rocks prepared by Cashion (1967, p. 5) after Kinney (1955) is given in the following table:

System	Unit	Thickness (ft)	Dominant lithology
	Mesaverde Formation (Group)	1,100	Sandstone and shale
Cretaceous -	Mancos Shale	5,070-5,290	Shale, siltstone, and sandstone
	Dakota Sandstone Cedar Mountain Formation ¹	95 – 135 50 – 176	Sandstone and shale Sandstone and shale
	C Formation		
	Morrison Formation	830- 930	Sandstone, mudstone, and shale
Jurassic -	Curtis Formation	150- 270	Sandstone, shale, and limestone
	Entrada Sandstone	105 - 215	Sandstone
	Carmel Formation	125- 390	Shale and sandstone
Jurassic and Triassic	Glen Canyon Sand- stone	720-1,030	Sandstone ,
Triassic -	Chinle Formation	230- 355	Shale, sandstone, and conglomerate
	Moenkopi Formation	820-1,120	Sandstone and silt- stone
Permian	Park City Formation	70- 195	Limestone and shale
Permian and Pennsylvanian	Weber Sandstone	1,015-1,275	Sandstone
Pennsyl va nian	Morgan Formation	1,035-1,450	Limestone and sand- stone
Mississippian	Black shale unit Limestone unit	0- 265 965-1,220	Shale and sandstone Limestone
Cambrian	Lodore Formation	0- 155	Sandstone
Precambrian	Uinta Mountain Group	3,000-4,000	Shale and sandstone

¹Added by writers.

Table 1.--General lithologic character and water-hearing properties of exposed geologic units

Geologic age	Geologic unit	, General lithologic character	General water-bearing properties
Quaternary	Unconsulidated deposits	Allovium, glacioflovial deposits, terrace gravels, and done sand. Clay, sand, gravel, and cobbles beneath the allovial plains of the larger streams and adjacent terraces and in the Pleasant Valley Wash area. Mostly gravel, sand, and s(it on henches and in the channels of some ephemeral streams. Thickness generally less than 50 feet (15 m), but locally may be more than 150 feet (46 m) as at well II(C-5-5) MADd-I (rable II).	Sand, gravel, and cobble deposits beneath stream valleys generally yield less than 50 gal/min (3.2 1/s), but may yield more than 100 gal/min (6.3 1/s) to large-diameter wells that tap thick saturated sections. Many of the terrace deposits are unsaturated or saturated only part of the year.
	Uinta Formation	Mostly thinly bedded shale, siltstone, and time-grained sand- stone with interhedded claystone and limestone. Individual heds generally less than 50 feet (15 m) thick. Maximum aggregate thickness more than 4,000 feet (1,219 m). Many of the strata are oil impregnated and the formation is cut in several places by gilsonite and ozorerite dikes.	Not water hearing in many places, having been drained by deeply incised streams. Where saturated (generally in discontinued perched aquifers) commonly yields less than 5 gal/min (0.32 l/s) to springs; exceptions are in Straberry River drainage where several springs discharge an estimated 50-500 gal/min (3.2-32 l/s). Yields less than 20 gal/min (1.3 l/s) to most wells.
Tertiary	Green River Formation	Thinly hedded stratm of shale, silistone, mudstone, fine- grained sandstone; some linestone and ruft. The percentage of thicker, more massive sandstone stratm-increases to the south. Maximum thickness of the tormation exceeds 5,000 feet (1,526 m) in the north-central part of the area. Formation is noted as a source of cil and gas, the Parachule Creek Nember, which comprises more than 95 of the exposed formation, contains extensive deposits of cil shale.	Overall permeability is low. All known springs that discharge from the tormation discharge from the Parachute Chreek Member; must yield less than 10 gal/min (0.65 1/s), and many yield less than 1 gal/min (0.06 1/s). Reported yields to the few wells that tap the formation are generally less than 10 gal/min (0.63 1/s), but several oil tests that tap the formation reportedly had initial flows of more than 100 gal/min (6.3 1/s), Upper part of the formation is not water bearing in many places owing to low permeability or having been drained by deeply incised streams.
ĺ	Wasatch Formation	Mostly shale, siltstone, and fine- to medium-grained sandstone with some lenticular conglomerate. Maximum thickness of formation exceeds 4,000 feet (1,219 m). The formation is an important source of oil and gas in the Uinta Basin.	Test data from oil and gas wells indicate that overall per- meability is generally low. The formation generally yields less than 50 gal/min (3.2 1/s) of water to springs and wells (oil and gas wells), but more than 100 gal/min (6.3 1/s) to two springs in the area. No water wells are known to tap the formation in the study area.
Tertiary and Cretaceous	Sedimentary rocks, undivided	Includes Colton Formation, Flagstaff Limestone, North Horn Formation, and Mesaverde Group (Tuscher Formation). Consist chiefly of shale, siltstone, modstone, and fine-grained sandstone; some limestone and lenticular conglomerate and coal beds. Maximum exposed thickness exceeds 2,000 feet (610 m). Maximum aggregate thickness (including units in the subsurface) exceeds 7,000 feet (2,134 m).	Permeability generally low. Support the flow of several widely scattered springs. Yields of three springs discharging from the North Horn Formation ranged from less than 1 gal/min (0.06 1/s) to about 6 gal/min (0.08 1/s). Oll-test data indicate that the rocks would yield less than 10 gal/min (0.63 1/s) of water to individual wells.

Little is known of the water-bearing properties of the older formations where they underlie the southern Uinta Basin. In adjacent areas, those of the older formations that contain sandstone and limestone as dominant lithologies locally have moderate to high permeability. For example, the Weber Sandstone of Permian and Pennsylvanian age, which was reportedly penetrated by Continental Oil Co. test well no. 22-1 (pl. 2), is a major aquifer in the Ashley Valley oil field just north of the area. (See Goode and Feltis, 1962, and Feltis, 1966.) However, data from the few oil and gas wells and tests that penetrate the older rocks within the southern Uinta Basin indicate that these rocks generally have low permeability and commonly yield very saline to briny water.

Climate

Most of the southern Uinta Basin is arid to semiarid. Above an altitude of about 8,000 feet (2,438 m), the climate is subhumid to humid.

Average annual precipitation (1941-70) ranged from less than 8 inches (203 mm) in the north-central part of the southern Uinta Basin to more than 26 inches (660 mm) in the extreme western part (pl. 1). Annual precipitation at Duchesne ranged from 4.60 to 15.70 inches (117 to 399 mm) and averaged 9.19 inches (233 mm) during 1906-72. A curve of cumulative departure from the 1906-72 average (fig. 4) indicates that dry cycles occurred in the area during the mid-1930's, the late 1950's, early 1960's, and from 1965 to 1972.

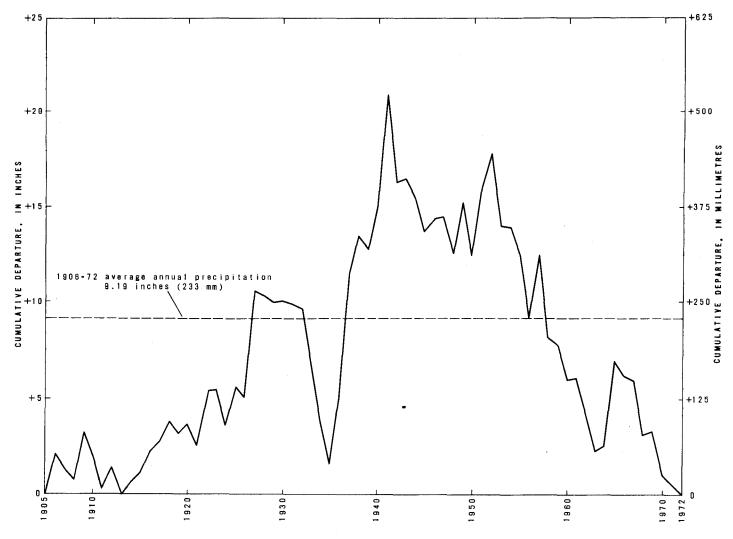


Figure 4. - Cumulative departure from average annual precipitation (1906-72) at Duchesne, Utah.

According to figure 5, most of the precipitation in the Duchesne area falls during the late summer months. This is the season of peak thunderstorm activity in the Uinta Basin. During these storms, local torrential rains result in rapid runoff and flash floods.

The Uinta Basin has hot summers and cold winters. During the period 1941-72, the mean annual temperature at Duchesne ranged from less than 20°F (-6.5°C) in January to about 70°F (21.0°C) in July (fig. 5). However, minimum midwinter temperatures commonly fall below 0°F (-18.0°C) and maximum midsummer temperatures commonly exceed 90°F (32.0°C).

Despite the cold winters, the growing season is fairly long. The average number of days between the last spring-first fall temperature of $28^{\circ}F$ (-2.0°C) ranged from 150 at Myton to 186 at Bonanza for the respective periods of record (table 2).

Table 2.--Number of days between last spring and first fall freeze at four stations

(Data from U.S. Environmental Data Service. Numbers in parentheses are number of years of record; stations are shown on pl. 1)

	Myton	Ouray Bonanza		Nutter Ranch		
Number of days	between the	last spring a	and first fall	temperature of:		
	32	2°F (0.0°C) oı	. below			
Average	127(19)	130(17)	155(20)	129(9)		
Maximum	169	158	188	164		
Minimum	95	89	126	97		
	28	3°F (-2.0°C)	or below			
Average	150(19)	158(17)	186(19)	152(9)		
Maximum	191	178	261	176		
Minimum	99	146	145	122		
24°F (-4.5°C) or below						
Average	173(22)	178(17)	207(17)	163(9)		
Maximum	196	215	273	200		
Minimum	139	152	159	135		

Potential evapotranspiration in the southern Uinta Basin is high. According to Iorns and others (1965, pl. 6), average annual lake evaporation in most of the area exceeds 36 inches (914 mm), which is considerably greater than the average annual supply from precipitation. Potential evapotranspiration at Ouray as determined by the Blaney-Criddle

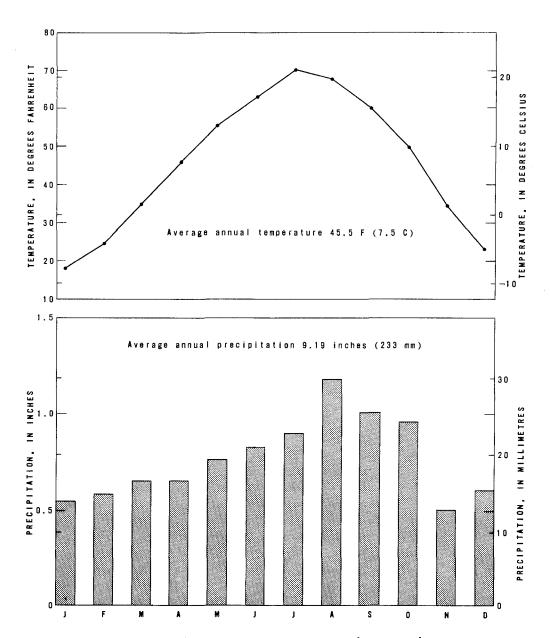


Figure 5.— Average monthly precipitation (1906-72) and average monthly temperature (1941-72) at Duchesne, Utah.

method (Cruff and Thompson, 1967, p. M15-M18) is about 51 inches (1,295 mm), or about nine times the measured average annual precipitation at that station.

Vegetation

Distribution of natural vegetation reflects the availability and chemical quality of water in the southern Uinta Basin. Along the alluvial plains of the Green, White, and lower Duchesne Rivers, where there is a perennial supply of water, the vegetative assemblage consists of a ground cover of greasewood (Sarcobatus vermiculatus), with scattered groves of cottonwood (Populus sp.), and patches of saltcedar (Tamarix sp.) and saltgrass (Distichilis stricta). Greasewood also covers most of the lower alluvial plains of the larger intermittent and perennial tributary streams that flow from the southern Uinta Basin, while salt-This assemblage of greasewood and cedar lines the stream channels. saltcedar persists in larger stream valleys from the mouths up to about the 6,000-foot (1,829 m) altitude. These two phreatophye types thrive in areas where the soil is too saline or alkaline for most other plants, and they consume tremendous quantities of water.

Rabbitbrush (*Chrysothamnus* sp.), a common phreatophyte that requires a somewhat better quality water than greasewood, was observed only in Evacuation Creek above the Colorado-Utah State line and in Sams Canyon.

The upper reaches of the largest tributary streams support a vegetative assemblage that requires good quality water. This assemblage includes willow (Salix sp.), wild rose (Rosa sp.), chokecherry (Prunus virginiana), and native meadowgrass (Glyceria sp.).

Along the lower slopes of the southern Uinta Basin between streams where surface water is scarce and ground water occurs at great depths, the vegetative assemblage consists of sparse growths of shad-scale (Atriplex confertifolia), sage (Artemesia sp.), and various other xerophytic plants. Upslope in the zones of increasingly greater precipitation, the vegetation changes to a sage-juniper (Juniperus sp.) -pin-yon (Pinus sp.) assemblage, which eventually gives way to an assemblage of aspen (Populus tremuloides), various conifers, and mountain meadows along the crest of the Roan Plateau.

WATER RESOURCES

In this report the Strawberry-Duchesne-White-Green River system is considered as a drain for the southern Uinta Basin. The main stem flow of these streams is not included in the following quantitative estimates. The streams are, however, a source of supply for the southern Uinta Basin and imports from them to the southern Uinta Basin are noted in the quantitative estimates.

Volume of precipitation

The average annual volume of precipitation that fell on the southern Uinta Basin during the period 1941-70 is estimated to be about 3.1 million acre-feet (3,800 hm³). This estimate (table 3) is based on an isohyetal map compiled by Fields and Adams (1975) for northeastern Utah. The isohyets for the southern Uinta Basin are on plate 1. In compiling the map, several low-altitude stations south of the basin were used for control because of the meager high-altitude precipitation data available in the southern Uinta Basin. Therefore, the estimated volumes of precipitation and ground-water recharge (table 3) may be low.

Table 3.—Estimated average annual precipitation and ground-water recharge from precipitation, 1941-70

	<u> </u>		*		
Precipitation zone	n Area (acres)	Prec Feet	ipitation Acre-feet	Ground-water Percent of	recharge
(inches)	(acres)	reet	ACTE-TEEL	precipitation	Acre-feet
An	cea underlain	by Uin	ta and Green	River Formations	
Less than 8	508,600	0.58	295,000	0	0
8 - 10	510,900	.75	383,200	0	0
10 - 12	602,100	.92	553,900	1	5,500
12 - 14	418,400	1.08	451,900	2	9,000
14 - 16	263,800	1.25	329,800	2	6,600
16 - 18	206,700	1.42	293,500	5	14,700
18 - 20	122,000	1.58	192,800	10	19,300
20 - 22	84,100	1.75	147,200	10	14,700
22 - 24	31,600	1.92	60,700	15	9,100
24 - 26	11,800	2.08	24,500	20	4,900
More than 26	14,200	2.25	32,000	25	8,000
Ar	ea underlain	by Wasa	atch Formatio	n and undivided r	ocks ¹
Less than 8	33,400	0.58	19,400	0	0
8 - 10	126,300	.75	94,700	1	900
10 - 12	109,100	•92	100,400	2	2,000
12 - 14	43,400	1.08	46,900	5 .	2,300
14 - 16	24,500	1.25	30,600	5	1,500
16 - 18	14,500	1.42	20,600	10	2,100
Totals					
(rounded)	3,125,000		3,100,000		100,000

¹Includes local mantle of unconsolidated surficial deposits.

Most of the precipitation that falls within the southern Uinta Basin is consumed by evapotranspiration and by sublimation from the winter snowpack at or near the place of fall. Some of the precipitation results in overland runoff, most of which also is consumed by evapotranspiration within the southern Uinta Basin. A small percentage of the precipitation seeps to the zone of saturation as ground-water recharge. Some of the recharge occurs as seepage through the rocks and soils upon which the precipitation falls and some occurs as seepage from streambeds.

Surface water

Principal streams

The Green, White, Duchesne, and Strawberry Rivers are the largest streams in the Uinta Basin. They all head beyond the boundaries of the southern Uinta Basin and mainly are confined to deep, narrow canyons where they touch on or flow through the area. These rivers receive runoff from the southern Uinta Basin by way of several perennial streams and numerous intermittent and ephemeral streams. The largest of the perennial and intermittent streams are Pariette Draw and Avintaquin, Antelope, and Nine Mile Creeks west of the Green River, and Willow, Bitter, and Evacuation Creeks east of the Green River (pl. 1). These streams drain about 58 percent of the southern Uinta Basin.

Streamflow measurements have been made at existing or former gaging stations along the Green, White, Duchesne, and Strawberry Rivers as well as several of the perennial and intermittent streams that flow from the southern Uinta Basin. Streamflow records collected at these stations are summarized in table 4.

Runoff characteristics

Runoff from the southern Uinta Basin is highly variable. For example, during the 20 years of record at gaging station 09308500 on Minnie Maud Creek, total annual runoff ranged from less than 1,000 acre-feet (1.2 hm 3) to more than 11,000 acre-feet (13.6 hm 3); and during the 18 years of record at gaging station 09307500 on Willow Creek, total annual runoff ranged from less than 10,000 acre-feet (12.3 hm 3) to more than 24,000 acre-feet (29.6 hm 3) (fig. 6).

Most of the runoff is during the spring and early summer (fig. 7) and is produced by melting of the winter snowpack along the high southern rim of the Uinta Basin. During the late summer months, however, cloudburst storms may result in severe local floods. This is evidenced in table 5, which shows that the annual peak discharge at three partial-record gaging stations in the southern Uinta Basin most commonly occurred in July, August, or September. In some parts of the area, stream channels are dry most of the year; consequently, a single summer cloudburst flood may account for a large percentage of the total annual runoff.

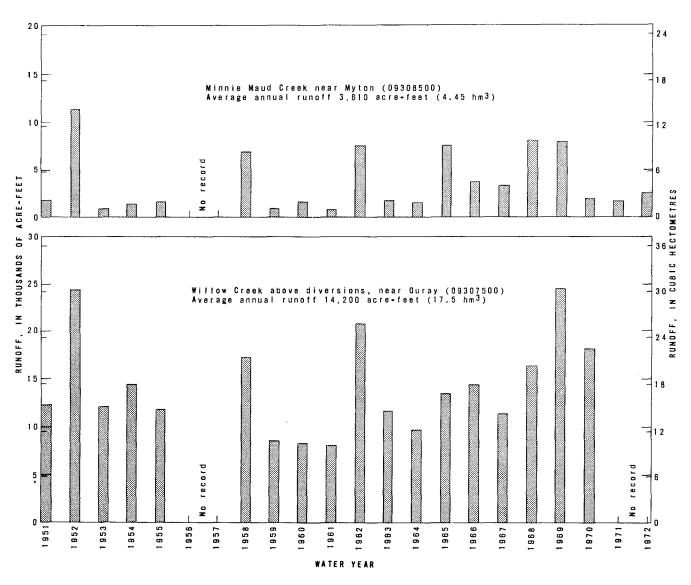


Figure 6.— Total annual runoff at two gaging stations.
(Number identifies station on pl. I.)

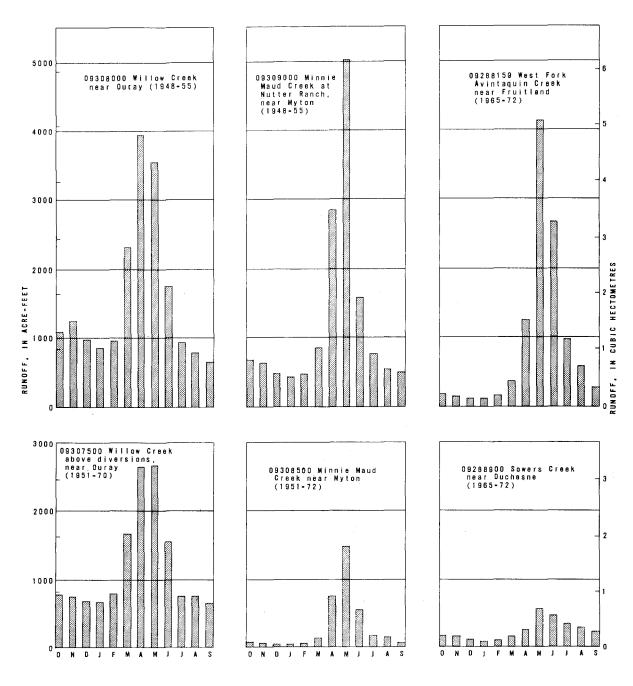


Figure 7.— Average monthly runoff at selected gaging stations.

(Number identifies station on pl. I.)

Table 4. -- Summary of streamflow records collected at selected stream-gaging stations

Period of record: Stations with records extending to September 1972 were still in operation as of that date.

Station]	Drainage		A	verage discha	rge		Extremes (ft ³ /s))
number (see pl. 1)	Name	area (mi ²)	Period of record	tt ³ /s	Acre-ft/yr	Number of years	Maximum	Date	Minimum	Date
09285000	Strawberry River near Soldier Springs	1/210	Oct. 1942-Sept. 1956; Oct. 1963-Sept. 1972	31.0	22,500	23	1,020	5- 4-5 2	6.5	1-23-64
09285500	Willow Creek near Soldier Springs	44	June 1943-Sept . 1947	5,3	3,865	4	192	7-30-43	0	During several months of the year
										*
09285700	Strawberry River above Red Creek, near Fruitland	1/360	Oct. 1963-Sept. 1972	58.8	42,600	9	610	5-14-64	9.7	12-8-63
09288150	West Fork Avintaquin Creek near Froitland	56	June 1964-Sept. 1972	15.0	10,8/0	8	1,830	8-22-/1	, 2	1-24-65
09288500	Strawberry River at Duchesne	1/950	June 1908-Nov. 1910; Mar. 1914-Sept. 1968	151	109,300	54	3,490	5- 7-52	1.0	Several days in July 1931
09288900	Sowers Creek near Duchesne	43	May 1964 - Sept. 1972	3.9	2,830	8	202	8- 3-66	0	Part of winter of 1964-65
09295000	Duchesne River at Myton	2,750	Discontinuous, Oct. 1899-Nov. 1910; con- tinuous, July 1911- Sept. 1972	533	386,200	64	12,800	6-10-22	Less than 1.0	7-16-31, several days in Aug. and Sept. 1934
09302000	Duchesne River near Randlett	3,920	Oct. 1942-Sept. 1972	589	426,700	30	10,300	6-13-65	2.2	8-12-61
09306500	White River near Watson	4,020	Apr. 1904-Oct, 1906; May-Nov. 1918; Apr. 1923-Sept. 1972	700	507,200	49	8,160	7-15-29	53	7-19-34
09306800	Bitter Creek near Bonanza	324	Oct. 1970-Sept. 1972	-	-	-	507	8-30-71	0	Many days each year
09307000	Green River near Ouray	35,500	Oct. 1947-Sept. 1955; Oct. 1956-Sept. 1966	5,428	3,930,000	18	43,600	6-11-52	470	July 31, Aug. 1, 1933
09307500	Willow Creek above diver- sions, near Ouray	300	Aug. 1950-Sept. 1955; Sept. 1957-Sept. 1970	19.6	14,200	18	668	8- 6-63	.3	Aug. 21-23, 1960
09308000	Willow Creek near Ouray	890	July 1947-Sept. 1955; (annual max. 1961, 1962-68)	27.0	19,550	8	2,320 2/2,600	8-27-52 7-31-64	0	Several times
3/09308200	Pleasant Valley Wash tributary near Myton	15	Oct. 1959-Sept. 1972	-	-	•	2,590	7- 9-68	0	Most of the time
09308500	Minnie Maud Creek near Myton	30	Aug. 1950-Sept. 1955; Sept. 1957-Sept. 1972	5.0	3,610	20	1,370	8-25-61	0	Several times
0930 9 000	Minnie Maud Creek at Nutter Ranch, near Myton	230	July 1947-Sept. 19552/; (annual max. Oct. 1959- Sept. 1972)	20.4	14,770	8	1,370	8-25-55	0	Do.
3/09309100	Gate Canyon near Myton	5.4	Oct, 1959-Sept, 1972		-	-	2/860 860	8- 2-61 9- 6-63	0	Most of the time

<sup>800 9-6-63

1/</sup> Includes approximately 170 square miles tributary to Strawberry Reservoir, from which water is diverted out of the Uinta Basin to the Great Basin.

2/ Estimated.

3/ Records annual maximum discharge only.

The magnitude and frequency of the annual peak discharges at the three stations listed in table 5 are shown in figure 8 by the Log-Pearson Type III analysis data. As shown in figure 8 at station 09309000 on Minnie Maud Creek, a discharge of about 750 ft³/s (21.2 m³/s) will be equaled or exceeded on the average of once every 2 years or has a 50 percent probability of occurring in any 1 year. At station 09309100 on Gate Canyon, a discharge of about 300 ft^3/s (8.51 m^3/s) will be equaled or exceeded on the average of once every 2 years or has a 50 percent chance of occurring in any 1 year. At station 09308200 on Pleasant Valley Wash tributary, a discharge of about 1,100 ft³/s (31.1 m³/s) would be equaled or exceeded on the average of once every 5 years and has a 20 percent probability of occurring in any 1 year.

Table 5.--Annual peak discharges at three partial-record gaging stations for water years, 1960-72

Annual peak discharge (ft³/s)		D	ate	
Minnie Maud Creek at Nutt	er Ranch, near Myton (st	ation	093	09000)
400		Sept.	1,	1960
1,000		Sept.		
680		Sept.		
690		Sept.		
240		July		
850		Aug.		
620		Aug.		
495¹		Aug.		
250		Oct.		
460		Sept.		
591		Sept.		
143		June	-	
Gate Canyon ne	ar Myton (station 093091	.00)		
34 ²		Sept.	17	1960
860 ²		Aug.	-	
		_	-	
125				1962
860		Sept.	-	
840		Aug.		
466 ²		Aug.		
8.2		June	-	
280	Between May 10 and	Oct.	21,	1968
390	;	Sept.	7,	1969
280	;	Sept.	6,	1970
280	:	Sept.	1,	1971
180		June	18,	1972
Pleasant Valley Wash tr	ibutary near Myton (stat	ion 09	308:	200)
		Sont	17.	1960
3.5 ²	;	Sept.		
3.5 ² 183				
	:	Sept.	9,	1961
183		Sept. Feb.	9, 13,	1961 1962
183 230 ² 969	:	Sept. Feb. Aug.	9, 13, 6,	1961 1962 1963
183 230 ²		Sept. Feb. Aug. June	9, 13, 6, 12,	1961 1962 1963 1965
183 230 ² 969 1,350 20		Sept. Feb. Aug. June July	9, 13, 6, 12,	1961 1962 1963 1965 1966
183 230 ² 969 1,350 20 2,590 ¹		Sept. Feb. Aug. June July July	9, 13, 6, 12, 1, 9,	1961 1962 1963 1965 1966 1968
183 230 ² 969 1,350 20		Sept. Feb. Aug. June July July	9, 13, 6, 12, 1, 9,	1961 1962 1963 1965 1966

¹Determined by field survey. ²Estimated.

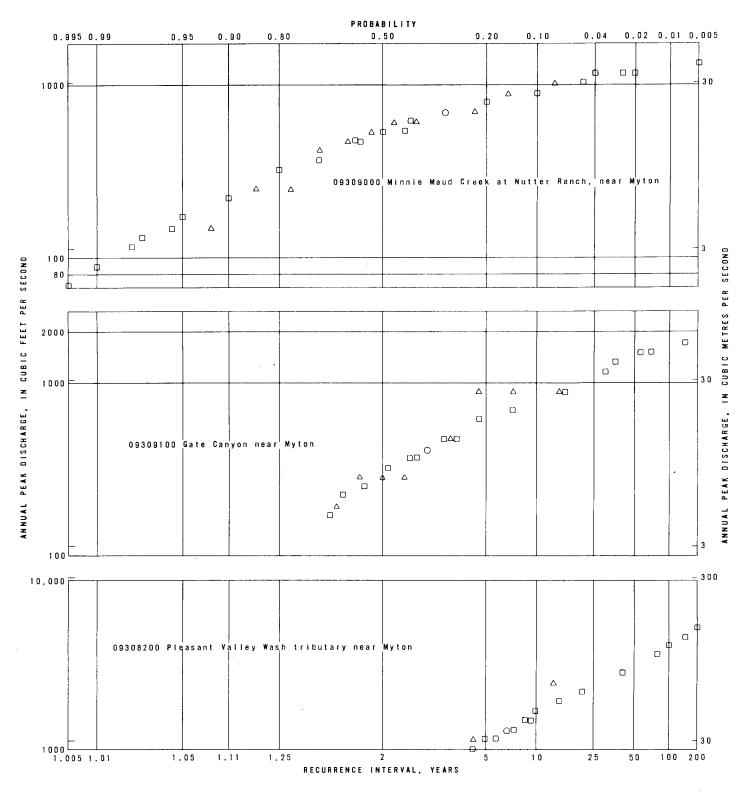


Figure 8.— Magnitude and frequency of annual peak discharges at three partial-record gaging stations. (See pl. I for locations of stations.) \$\triangle\$, estimated value from partial-record station; \$\to\$, calculated value from Log-Pearson Type III analysis; \$\to\$, estimated value and calculated value in same position.

Estimated mean annual runoff

Mean annual runoff from the southern Uinta Basin is estimated to be on the order of 134,000 acre-feet (165 $\,\mathrm{hm}^3$). This estimate is based partly on a method described by Moore (1968) to determine mean annual runoff from ungaged areas using stream-channel geometry characteristics. Estimates of runoff at selected sites are given in table 6.

The channel-geometry method of estimating mean annual runoff assumes that the cross-sectional area of a stream channel at a given site is determined by the long-term runoff past that site; it has proven reasonably accurate when tested in gaged drainage basins. The error of estimate using stream-channel geometry is lowest for perennial streams with high annual runoff and highest for ephemeral streams with low annual runoff. According to F. K. Fields (U.S. Geol. Survey, oral commun., 1973) the error of estimate for gaged streams in the Utah part of the Colorado River system was about 14 percent for perennial streams and about 20 percent for ephemeral streams. In the southern Uinta Basin, the estimated runoff in Willow Creek at the site of former station 09308000 (table 6, site 13) was within 3 percent of the average annual gaged runoff for 8 years of record (table 4). The estimated mean annual runoff from Avintaquin Creek is 14,600 acre-feet (18 hm³) (table 6, site 2). This estimated runoff is only about 7 percent greater than the average annual runoff (1969-72) from that basin as determined by the difference of the gaged discharge of the Strawberry River immediately above (including inflow from Red Creek) and below the mouth of Avintaquin Creek.

The largest discrepancy (about 40 percent) between estimated mean annual runoff and average annual gaged runoff was for Willow Creek at the site of station 09307500 (see tables 4 and 6). Recent high runoff and streambank erosion at the site made it unusually difficult to determine the channel characteristics that result from long-term mean annual runoff.

Stream-channel geometry measurements were made at or near the mouths of all principal streams draining to the Green, White, Duchesne, and Strawberry Rivers. This provided an estimate of runoff from about 3,300 square miles $(8,547~{\rm km}^2)$ or 67 percent of the southern Uinta Basin.

Most of the area for which channel-geometry determinations were not made included the largely inaccessible areas that drain to the Green River in Desolation Canyon and several of the upland areas that drain to the upper Strawberry River. In order to estimate mean-annual runoff from these areas, an altitude-runoff relation using data given in table 6 was calculated and applied to the inaccessible areas. Because of the numerous small individual drainages in these areas, however, the results proved unsatisfactory. They were too high. Therefore, an estimate for runoff-per-unit-area--27.3 acre-feet (0.03 hm³) per square mile (2.6 km²) per year--was determined from data given in table 6 and applied to the entire southern Uinta Basin. This gave an estimate for total annual runoff from the southern Uinta Basin of about 134,000 acre-feet (165 hm³)--about 90,000 acre-feet (111 hm³) from basins listed in table 6 and

Table 6.--Estimated mean-annual runoff at selected sites (Estimates by F. K. Fields and Don Price)

Type: EI, ephemeral or intermittent; P, perennial.

Number	Name	Т	*****	age basin Mean altitude	Runoff
on plate 1	Name	Туре	Area (mi²)	(ft)	(acre- ft/yr)
1	Timber Canyon	P	47	4,450	5,800
2	Avintaquin Creek	P	140	8,100	14,600
3	Sams Canyon	EI	24	7,565	1,680
4	Indian Canyon	P	98	7,595	1,270
5	Right Fork Indian Canyon	P	28	7,960	450 ¹
6	Coyote Canyon	EI	17	6,295	220
7	Cottonwood Canyon	ΕI	30	6 , 935	760
8	Antelope Creek	P^2	200	7,280	1,270
9	Unnamed	EI	8.6	5 , 550	840¹
10	Big Wash	ΕI	42	6,465	520 ¹
11	Peters Wash	EI	14	6,210	730 ¹
12	Pariette Draw	P 3	310	5,875	18,900
13	Willow Creek (At gaging station 09308000)	P ²	940	7,000	20,100
14	Willow Creek (At gaging	_		·	-
	station 0930 7 500)	P	310	7,650	8,400 ¹
15	Ute Canyon	ΕI	4.5	6 , 675	140¹
16	Cottonwood Wash	EI	140	5,445	850
17	Bitter Creek (At gaging				
	station 09306800)	EI	320	6 , 945	800
18	Evacuation Creek	ΕI	300	6 , 560	2,630
19	do	\mathtt{EI}	220	6 , 860	780¹
20	Park Canyon	EI	32	6,425	10 ¹
21	Hells Hole Canyon	EI	`28	6,240	40
22	Gilsonite Draw	ΕI	8.5	6,160	70
23	Cottonwood Creek	ΕI	48	5,970	720
24	Shavetail Draw	EΙ	10	5,660	290
25	Sand Wash	EI	1.1	6,560	110 ¹
26	do	ΕI	10	5 , 895	1,650
27	Nine Mile Creek	P	230	7,890	$14,800^{1}$
28	do	P	460	7,500	15,800
29	Range Creek	EI	150	7,195	2,160

¹Represents runoff past the site but not from the project area. Not used to estimate total runoff from the project area.

²Intermittent at mouth owing to upstream diversions for irrigation and to consumptive use by native vegetation.

³Receives tailwater from the Duchesne River diversions for irrigation in the Pleasant Valley area.

about 44,000 acre-feet (54 hm³) from those basins for which channel-geometry determinations were not available.

Using runoff maps for Utah compiled by Bagley and others (1964), potential mean annual runoff from the southern Uinta Basin (including the part in Colorado) was estimated to be on the order of 240,000 acrefeet (296 hm³). This assumes an average mean annual runoff of 0.25 inch (6 mm) for the areas shown on the maps of Bagley and others (1964) that produce less than 1 inch (25 mm) of runoff. This estimate is about 106,000 acre-feet (131 hm³) greater than the estimate based on channel geometry; and it may be too high because the runoff maps were compiled largely from data collected along the Wasatch Front where consumptive use of streamflow by phreatophytes is not as pronounced as in the southern Uinta Basin (see Bagley and others, 1964, p. 65). Assuming both estimates to be reasonably correct, however, then as much as 106,000 acre-feet $(131 \text{ } \text{hm}^3)$ of the water available for runoff is consumed by evapotranspiration along the principal waterways where consumptive use of water by phreatophytes and other vegetation is greatest. An example of the depletion of streamflow by phreatophytes is illustrated by streamflow data collected along Willow Creek. (See table 7.)

Table 7.--Streamflow data collected along Willow Creek,
September 27 and 28, 1972

Specific conductance: f, determined by field conductivity meter; L, determined by laboratory analysis; see also table 13.

Location number (see pl. 1)	Date	Discharge (ft³/s)	Specific conductance (micromhos/ cm at 25°C)	Miles downstream from site S1	Miles between sites
S1	9-27-72	3.52	1,000f	_	_
S2	do	3.07	1,000f	3.2	3.2
S3	do	3.06	1,000f	5.5	2.3
S4	do	2.85	1,010L	8.7	3.2
S5 ¹	do	•26		19.4	10.7
S6	9-28-72	• 25	6,000L	21.5	2.1
S7	do	.08	5,970L	23.0	1.5
S8	do	0	-	25.4	2.4

¹Undetermined amount of water diverted for irrigation above this site.

According to table 7, there is a streamflow depletion of 0.45 ft³/s (0.013 m^3 /s) in the 3.2-mile (5.1 km) reach of Willow Creek between sites S1 and S2. Along this reach the valley floor is covered with a luxuriant growth of greasewood, and the stream is lined locally with saltcedar. There are no manmade streamflow diversions. Also, it seems unlikely that there is any stream loss to the underlying bedrock formations because artesian conditions apparently exist along this reach as indicated by Sulphur Spring, (D-12-21)19bdd-S1, and artesian well

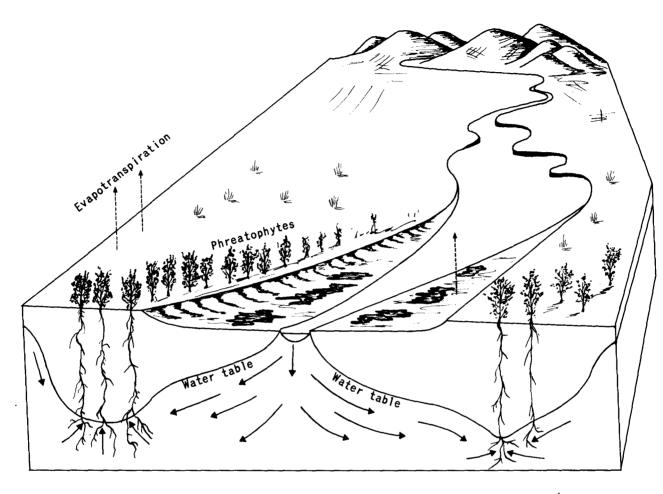


Figure 9.— Sketch illustrating how water moves from streams to adjacent alluvial aquifers and is consumed by phreatophytes.

annual inflow to Starvation Reservoir from the western part of the area is estimated to be on the order of 26,000 acre-feet (32.1 hm³). Nearly all of this inflow is from Avintaquin, Timber Canyon, and Sams Canyon Creeks (table 6) and from Willow Creek (station 09285500 in table 4). There is no direct method to determine how much water from these streams is returned to the southern Uinta Basin with the imported water. Considering evaporation losses in the reservoir perhaps 91 percent of this water could be released from the reservoir to the Duchesne River and returned to the area with the imported water. This is roughly 24,000 acre-feet (29.6 hm³) per year, or about 6 percent of the flow of Therefore the estimated average annual the Duchesne River at Myton. import of 75,000 acre-feet (92.5 hm3) per year is reduced by 6 percent, and the net import is on the order of 70,000 acre-feet (86.3 hm3) per year.

Some of the imported irrigation water is returned as tailwater to the Duchesne River, and water from the Pleasant Valley area reaches the Green River through Pariette Draw. Records are not available from which to determine the volume of imported irrigation water that is returned to the Duchesne and Green Rivers; but it could average as much as 30 percent of the total diversion, or on the order of 20,000 acre-feet (24.7 hm³) per year.

Some water also is imported from various sources in the northern Uinta Basin for culinary use in the Duchesne-Myton-Pleasant Valley area. The amount is not known but probably is less than 500 acre-feet (0.6 $\,\mathrm{hm}^3$) per year. All this water is consumed within the southern Uinta Basin.

Ground water

Recharge

Ground-water recharge in the southern Uinta Basin is derived from precipitation that falls within that subbasin and seepage losses of water imported for irrigation. Geologic structure may permit subsurface inflow through pre-Tertiary rocks, as in the northwestward plunging Uncompange uplift (see fig. 3), but there are no data to support this assumption. Also the northward-dipping strata that crop out in the Book Cliffs to the south probably convey some water into the area. However, the amount of inflow is assumed to be small because the zone of potential ground-water recharge high in the Book Cliffs is confined to a few narrow outcropping bands of permeable strata that are capable of intercepting precipitation and runoff and conveying it into the southern Uinta Basin.

The principal source of ground-water recharge is precipitation that falls on the high southern rim of the Uinta Basin. Water from rain and melting snow percolates directly, or from streams, into the underlying sedimentary rocks. Recharge from precipitation was estimated using a method developed by Eakin and others (1951, p. 79-81) and modified by Hood and Waddell (1968, p. 22-23). The method assumes that a fixed percentage of the average annual precipitation becomes groundwater recharge, taking into account such factors as volume, time, and

area of distribution of precipitation, geology, and physiography. The estimate includes not only direct recharge from precipitation but also recharge from streamflow.

Because of the predominantly fine-grained nature and low permeability of the rocks in the recharge area, percolation rates are very slow. It is assumed, therefore, that most recharge occurs during the winter when rain and snowstorms are more widespread and of longer duration. The torrential late summer storms, which produce most of the total annual precipitation (p. 12) and significant runoff, are generally of too short duration to significantly add to ground-water recharge. Therefore, it is estimated that only about 100,000 acre-feet (123 hm³) or about 3 percent of the estimated average annual precipitation becomes ground-water recharge. (See table 3.)

Ground-water recharge from imported irrigation water is significant in the Pleasant Valley area and along the alluvial plain of the Duchesne River. R. W. Cruff and J. W. Hood (U.S. Geol. Survey, written commun., 1974) found that the net loss from the Grey Mountain and Pleasant Valley Canal system averaged $24.5 \text{ ft}^3/\text{s}$ (0.7 m³/s) during seepage studies made between May 1972 and June 1973. Part of this water apparently reappears at the surface near the canals where it is consumed by evapotranspiration. This is indicated by patches of phreatophytes and areas of barren soil on which evaporated water has left a crust of alka-Some of the water that seeps from the canal system, however, does percolate to the ground-water reservoir, as does water from ditches and irrigated fields. Several well owners report that water from their wells is of better chemical quality during the irrigation season than during the nonirrigation season, consistent with the much lower concentration of dissolved solids in water from the Duchesne River. tables 13 and 14.)

Assuming that at least 25 percent of the 75,000 acre-feet (92.5 $\,\mathrm{hm}^3$) of water that is imported from the Duchesne River annually seeps to aquifers from local canals and irrigated land, then total annual recharge from imported water may be on the order of 20,000 acre-feet (24.7 $\,\mathrm{hm}^3$). Total ground-water recharge from precipitation and imported water, therefore, is on the order of 120,000 acre-feet (148 $\,\mathrm{hm}^3$).

Occurrence

Ground water in the southern Uinta Basin is in a complex system of shallow unconfined, perched, and deep confined aquifers. Shallow unconfined aquifers exist in the principal recharge area, along the southern rim of the Uinta Basin, where they support the flow of many perennial springs such as PR and Marble Springs (table 12), and in unconsolidated deposits underlying the Pleasant Valley area and the alluvial plains of the larger perennial streams. Most of the wells in the southern Uinta Basin tap the unconsolidated deposits in the Duchesne-Myton-Pleasant Valley area. Perched aquifers exist beneath the tablelands between the major streams where they support the flow of small widely scattered intermittent springs such as (D-10-17)12baa-Sl and (D-11-15) 15dbb-Sl (table 12).

Deep artesian aquifers in bedrock underlie a major part of the southern Uinta Basin. Such aquifers have been penetrated by a number of oil and gas wells such as wells (D-11-24)6dbc-1 and 7cac-1, which have been converted to stockwater wells (table 10).

Movement

The available water-level data in the southern Uinta Basin are insufficient to determine the direction of ground-water movement with any degree of accuracy. The few available data indicate that west of the Green River, ground water moves generally northward to the Strawberry and Duchesne Rivers and eastward toward the Green River, with local components of movement toward the larger tributary streams. East of the Green River, ground water generally moves northward toward the White River and westward toward the Green River, with local components of movement toward the larger tributary streams.

The rate of ground-water movement is slow in most places because of the generally low permeability of the rocks through which the water moves. This slow rate of movement allows longer periods of contact between the water and the rock minerals and contributes to the consistently high concentration of dissolved solids in the water. The slow rate of movement is also responsible for the low yields and large water-level drawdowns in many wells that tap these rocks (see table 10).

Some ground water moves from the Colorado part of the southern Uinta Basin to the Utah part, but the annual volume of movement is relatively small. Only about 3,000 acre-feet (3.7 hm³) of the total estimated average annual recharge to the ground-water system in the southern Uinta Basin (table 3) is in Colorado. It is estimated that about 1,500 acre-feet (1.8 hm³) per year of this water is consumed within Colorado-about 1,200 acre-feet (1.5 hm³) by evapotranspiration along the alluvial plains of the White River, Evacuation Creek, and several intermittent creeks, and about 300 acre-feet (0.4 hm³) by diffuse seepage to the White River (from ground-water discharge factors developed on pages 33-35). Discharge of ground water from wells and springs in the Colorado part of the southern Uinta Basin is insignificant. The remaining 1,500 acre-feet (1.8 hm³) per year enters Utah as subsurface inflow.

Storage

Estimated recoverable storage.—Large quantities of water are stored in the rocks that underlie the southern Uinta Basin. Because of the generally low permeability of these rocks, however, only a fraction of the water can be withdrawn, and it generally is yielded slowly to wells. Furthermore, the water occurs at great depths beneath the land surface at places along the lower slopes of the southern Uinta Basin, and although physically recoverable, recovery may not be economically feasible.

For this report, the volumes of recoverable water in storage in unconsolidated deposits and in the consolidated rocks are estimated separately and without regard to chemical quality. The unconsolidated deposits have a much greater specific yield (ratio of volume of water

yielded by saturated rocks to the total volume of those saturated rocks) than the unconsolidated rocks, but because of their small extent and thickness, the unconsolidated deposits have a much lower storage capacity. The areal extent of the saturated unconsolidated deposits is about 96,000 acres $(38,850 \text{ hm}^2)$ and their average saturated thickness is about 20 feet (6.0 m). Assuming that they have an average specific yield of 0.10, the volume of recoverable water in them is about 190,000 acre-feet (234 hm^3) .

Although water is stored to great depths in the consolidated rocks, recoverable water is estimated for only the upper 100 feet (30.5 m) of saturation in these rocks. Beneath the alluvial plains of the larger streams, the top of the zone of saturation is within 100 feet (30.5 m) of the land surface; but between streams along the lower slopes of the southern Uinta Basin, it is more than 500 feet (152 m) deep. The average specific yield of the consolidated rocks is estimated to be only about 0.01 based on data from well (D-9-20)36ddc-1 (Weir, 1970) and on low yields of most wells and springs that discharge from these rocks. The total volume of rocks in the upper 100 feet (30.5 m) of saturation is on the order of 300 million acre-feet (370,000 hm³), and, therefore, the volume of recoverable water may be on the order of 3 million acrefeet (3,700 hm³). Because of the low permeability of these rocks, however, the water is not easily recovered by wells. In most places, vields to individual wells can be expected to be less than 50 gal/min (3.6 1/s).

Water-level fluctuations.—Water-level fluctuations in wells reflect changes in ground-water storage. Rising water levels indicate increases in storage whereas declining water levels indicate decreasing storage. Under natural conditions the ground-water system is in dynamic equilibrium. Average annual recharge and discharge are equal, and the volume of ground water in storage remains constant over a long period of time.

Periodic measurements of water levels have been made in an number of wells in the Uinta Basin to record changes in storage. Measurements at well U(C-4-2)5bba-2, the only water-level observation well in the southern Uinta Basin, are shown by the hydrograph in figure 10. The well taps unconsolidated deposits in the general area of greatest well density in the southern Uinta Basin.

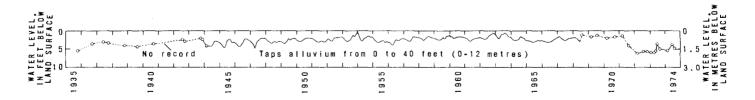


Figure 10. - Depth to the water level in well U(C-4-2)5bba-2 near Myton, Utah.

According to the hydrograph, water levels fluctuated seasonally during the period 1935-70, reflecting seasonal changes in ground-water storage with little overall change from year to year. During 1971, however, the water level in the well declined about 5 feet (1.5 m). Because there was no known significant increase in ground-water withdrawals in the area during that period, the decline must be attributed to a change in ground-water recharge. There probably has been a decrease in natural recharge owing to recent below normal precipitation in the area (fig. 4), and there may have been a decrease in recharge from irrigation. The unconsolidated deposits in this area apparently receive some recharge by seepage from canals and irrigated land. Probable changes in irrigation diversions and practices in the area may have caused a reduction of recharge from irrigation and resulting water-level decline in the well.

Local year-to-year declines of water levels in consolidated rocks in the northern Uinta Basin have been attributed to continued or increased ground-water withdrawals (Price and Arnow, 1974, p. C16). In the northern Uinta Basin availability of water for recharge is much greater than it is in the southern Uinta Basin. It seems reasonable, therefore, to conclude that any local large-scale withdrawals of ground water from consolidated rocks in the southern Uinta Basin would result in a depletion of storage and a decline of water levels.

Discharge

Ground water is discharged from the southern Uinta Basin by seeps and springs, evapotranspiration, diffuse seepage to the Green, White, Duchesne, and Strawberry Rivers, and by wells. Some ground water may move to the northern Uinta Basin in deep, confined aquifers which dip northward into the northern Uinta Basin. Also, ground water might possibly move along fault and gilsonite-dike zones that cross into the northern Uinta Basin. However, no direct data exist to confirm such movement to the northern Uinta Basin. It is most probable, therefore, that ground water moving northward through the area (at least in the upper 100 feet or 30.5 m of saturated rock) discharges by diffuse seepage to the Strawberry, Duchesne, and White Rivers or their alluvial deposits.

Seeps and springs.—Discharge of ground water through individual seeps and springs in the southern Uinta Basin is estimated to be on the order of 4,500 acre-feet $(5.6~\mathrm{hm^3})$ per year. Most of the springs and seeps are above the 7,000-foot $(2,134~\mathrm{m})$ altitude and are concentrated mostly in the headwater areas of Avintaquin, Willow, and Bitter Creeks (pl. 1). However, a number of springs, including those with the largest yields, are at lower altitudes.

All springs known to have estimated or reported yields of more than 100 gal/min (6 1/s) and a representative sampling of springs with smaller yields are listed in table 12. Assuming that the recorded yields of the four large springs in table 12 approximate the annual average yield of those springs, then they would have a total annual discharge of about 1,300 gal/min (82 1/s) or about 2,100 acre-feet (2.6 hm³) per year.

At least 270 springs are shown on the U.S. Geological Survey 7½' and 15' topographic quadrangle maps of the southern Uinta Basin. Field observations indicate that the maps show only about half of the springs and seeps actually in the mapped area. Therefore, it is estimated that there are at least 500 individual springs and seeps in the area. Of these 500 springs and seeps, several have reported yields of as much as 60 gal/min (3.8 1/s) (table 12), but most of the springs observed by the writers had yields of 0.5 to 5 gal/min (0.03 to 0.32 1/s). It is concluded from these observations that the average yield per spring is about 3 gal/min (0.19 1/s), and that total annual discharge from them averages about 1,500 gal/min (95 1/s) or about 2,400 acre-feet (3.0 hm³) per year. This, plus the 2,100 acre-feet (3.0 hm³) per year from the four large-yield springs, gives a total discharge from springs and seeps of about 4,500 acre-feet (5.6 hm³) per year.

Some of the water from Stinking Springs, Camel Rocks Springs, and several springs observed by Thomas (1952, p. 23) in Desolation Canyon reaches the Strawberry and Green Rivers and leaves the area as streamflow. Essentially all the water discharged by the other seeps and springs in the southern Uinta Basin is consumed at or near the point of discharge.

Evapotranspiration.—A large volume of ground water is consumed annually by evapotranspiration in the southern Uinta Basin. Most of this water is consumed by greasewood, saltcedar, and saltgrass along the lower reaches of the perennial and larger intermittent streams. The plants are all phreatophytes (water-loving plants that thrive on ground water) that have a high salt tolerance. Under ideal growing conditions and 100 percent plant density, greasewood may consume 2 feet (0.6 m) or more of water annually, and saltcedar may consume as much as 9 feet (2.7 m) (Mower and Nace, 1957, p. 21, and Robinson, 1958, p. 75). The figure for greasewood probably is representative for the southern Uinta Basin, but the figure for saltcedar is somewhat high as it was obtained in a warmer climatic zone with a longer growing season.

As noted earlier, these plants are the dominant vegetation along the alluvial plains of the Green, White, and the lower Duchesne Rivers and the larger streams that head in the southern Uinta Basin. Estimated consumptive use of water in the southern Uinta Basin by these phreatophytes ranges from about 1.5 to 3.5 feet (0.5 to 1.1 m) and totals about 204.000 acre-feet (252 hm³) per year (table 8). Although essentially all the water consumed by phreatophytes along the flood plains of the perennial streams (the first three groups in table 8) is ground water, much of this water is derived from streamflow induced into the adjacent alluvial aquifers by the pumping effect of the phreatophytes as shown in figure 9 and discussed on pages 24-25. Because this water simply passes through the aquifer to the plant roots at a relatively rapid rate, it has not been regarded as a source of ground-water recharge in this report, nor is it counted as ground-water discharge by evapotranspiration. However, some of the water consumed by phreatophytes is derived directly from the ground-water system (from alluvium that would be saturated even if the phreatophytes did not exist).

Table 8.--Estimated consumptive use of water by phreatophytes in nonirrigated areas

Area	Phreatophyte	Areal extent (acres)	Average use factor (ft/yr)	Consumptive use (acre-ft/yr)
Flood plains of the Green and White Rivers	Greasewood, cottonwood, saltcedar, and saltgrass	22,100	3.5	77,400
Flood plains of Duchesne and Strawberry Rivers	Greasewood, saltcedar, saltgrass, cottonwood, and willow	3,700	3.0	11,100
Flood plains of the following streams and their tributaries: Avintaquin, Indian Canyon, Antelope, Willow, Bitter, Evaruation, Nine Mile, and Range Creeks, and Pariette Draw	Greasewood, saltcedar, saltgrass, and some rabbitbrush; cottonwood and willow in upper reaches of streams	45,000	2.5	112,500
Sams, Lake, and Coyote Canyons; Cottonwood Wash; Cottonwood Creek, Colo.	Rabbitbrush in Sams Canyon; greasewood in other drainages	3,200	.75	2,400
		Total (rounded)	204,000

The percentage of consumed water that is derived from induced seepage from streamflow may be approximated from measured streamflow depletion between sites S1 and S2 on Willow Creek (table 7). Discharge of ground water only by evapotranspiration is equal to the total estimated consumptive use of water by phreatophytes (table 8) minus that percentage estimated to be from induced seepage from streamflow. According to table 7, the streamflow depletion between sites S1 and S2 on September 27, 1972, was $0.45 \text{ ft}^3/\text{s}$ ($0.013 \text{ m}^3/\text{s}$). As noted on pages 24-25, this loss is attributed entirely to consumptive use of water by phreatophytes growing along the alluvial plain of the stream between the two sites, and the consumptive use rate may approximate the annual mean. Therefore, the consumptive use of streamflow by phreatophytes between sites S1 and S2 may total about 300 acre-feet (0.4 hm³) per year. About 200 acres (80.9 hm²) of phreatophytes in this reach have an estimated annual water requirement of about 2.5 feet (0.8 m) or 500 acre-feet (0.6 hm^3). With an annual contribution of 300 acre-feet (0.4 hm^3) from induced streamflow, the annual draft from ground water without the induced streamflow component is about 200 acre-feet (0.2 hm³), or 40 percent of the total consumptive use. If this factor were applied to the estimated consumptive use of water by phreatophytes along perennial streams (the first three categories in table 8) in the southern Uinta Basin, about 80,400 acre-feet (99.2 hm³) would be from ground water. An estimated additional 2,400 acre-feet (3.0 hm³) of ground water is consumed along intermittent and ephemeral streams. Therefore, the total estimated discharge of ground water by evapotranspiration is estimated to be on the order of 83,000 acre-feet (102 hm³) per year.

Diffuse seepage to the Green, White, Duchesne, and Strawberry Rivers.—Some ground water discharges from the southern Uinta Basin to the Green, White, Duchesne, and Strawberry Rivers. Part of this water is consumed by evapotranspiration along the courses of those streams and part leaves the Uinta Basin in the Green River.

The volume of ground water that leaves the southern Uinta Basin by diffuse seepage to the Green, White, Duchesne, and Strawberry Rivers cannot be determined with any degree of accuracy from available data. A

provisional estimate is made from the meager stream discharge records, which themselves are partly estimated.

Streamflow records in the files of the Geological Survey indicate that the average (1941-70) rate of gain in flow of the Green River between the gaging stations near Ouray (site 3070 on pl. 1) and Green River, Utah (about 9 miles or 14.5 km south of the southern Uinta Basin), was about 200 ft 3 /s (5.7 m 3 /s) (F. K. Fields and D. B. Adams, U.S. Geol. Survey, written commun., 1974). Subtracting the average (1941-70) rate of inflow (102 ft³/s or 2.9 m³/s) from the Price River, which enters the Green River just downstream from the southern Uinta Basin, the net measured gain in flow of the Green River between Ouray and Green River, Utah, was found to be about $100 \text{ ft}^3/\text{s}$ (2.9 m³/s) during the period 1941-70. To this should be added the unmeasured evapotranspiration loss along this reach of the river. Thomas (1952, p. 29) estimated that the rate of evapotranspiration loss in the reach between Ouray and Green River, Utah, totaled 54 ft^3/s (1.5 m^3/s) during a reconnaissance of the river in September 1948. Assuming this approximates the average of loss during the period 1941-70, then the actual rate of gain in flow (net measured gain plus evapotranspiration loss) during that period would have been about 150 ft³/s (4.2 m³/s), or on an annual basis-about 108,600 acre-feet (134 hm³) per year. For practical purposes, all this gain in flow is attributed to inflow from the southern Uinta Basin. (Other than from the Price River, there is insignificant inflow between the southern Uinta Basin and Green River, Utah.)

Estimates of mean annual runoff in the streams listed in table 6 that drain to the Green River below Ouray totaled about 57,000 acre-feet (70.3 hm³). Using the area-runoff relation--27.3 acre-feet (0.03 hm³) per year per square mile (2.6 km²)--discussed on page 22, total runoff from all other streams draining to the Green River below Ouray is estimated to be about 25,000 acre-feet (30.8 hm³) per year. Another 2,000 acre-feet (2.5 hm3) per year probably enters the Green River in this reach from individual springs, according to Thomas (1952, p. 23). Therefore, total inflow to the Green River from streams and individual springs is estimated to be on the order of 84,000 acre-feet (104 hm³). Subtracting this from the total gain in flow of 108,600 acre-feet (134 hm³) per year leaves about 25,000 acre-feet (30.8 hm³) per year, which may be attributed to diffuse seepage of ground water directly into the stream channel. This is about 200 acre-feet (0.24 hm³) per river mile (1.6 km), of which 100 acre-feet (0.1 hm^3) per river mile (1.6 km) is assumed to be contributed from each side of the river.

The rocks that bound the Green, White, Duchesne, and Strawberry Rivers are lithologically similar; therefore, on the average, they are assumed to have similar permeabilities. Ground-water gradients toward the White, Duchesne, and Strawberry Rivers from the south are on the average about half as steep as gradients to the Green River (see pl. 1). Therefore, the diffuse seepage of ground water to the former three streams from the south probably averages only about 50 acre-feet (0.06 hm³) per mile (1.6 km) per year. Along the total 137-mile (220 km) courses of these streams, therefore, total ground-water inflow from the

southern Uinta Basin may be on the order of 7,000 acre-feet (8.6 hm³) per year. Total annual discharge of ground water by diffuse seepage to the Green, White, Duchesne, and Strawberry Rivers then is estimated to be on the order of 30,000 acre-feet (37.0 hm³) per year, all of which leaves the area as part of the ground-water component of streamflow.

Wells.--Ground water is discharged from both water wells and oil and gas wells in the southern Uinta Basin. According to the records of the Utah Division of Oil and Gas Conservation, approximately 600,000 gallons $(2,271~\mathrm{m}^3)$ of water were produced from oil and gas wells in the area during 1972. This is less than 2 acre-feet $(0.002~\mathrm{hm}^3)$. Total discharge from the few known flowing artesian wells (table 10) amounts to about 400 acre-feet $(0.5~\mathrm{hm}^3)$ per year. Annual discharge from all other wells in the area is estimated to total about 100 acre-feet $(0.1~\mathrm{hm}^3)$. Most of these wells are concentrated in the Duchesne-Myton-Pleasant Valley area where many are used only for stock or standby-domestic supply. Total annual discharge from all wells in the southern Uinta Basin, therefore, is estimated to be on the order of 500 acre-feet $(0.6~\mathrm{hm}^3)$.

SUMMARY OF QUANTITATIVE ESTIMATES

Table 9 summarizes the estimated values for various components of the hydrologic system in the southern Uinta Basin.

About 94 percent of the average annual volume of water entering the southern Uinta Basin from precipitation and imports is consumed by evapotranspiration within that subbasin. The remaining 6 percent enters the Green, White, Duchesne, and Strawberry Rivers--mostly as overland runoff.

CHEMICAL QUALITY OF WATER

General

The types and amounts of dissolved solids in water in the southern Uinta Basin vary greatly over short distances both areally and with depth. The dissolved-solids concentrations of most streams increase rapidly in a downstream direction, especially during low-flow periods in late summer; and the dissolved-solids concentrations of the ground water change markedly from one aquifer to another. Streamflow ranges from fresh to moderately saline and ground water ranges from fresh to briny, according to the following classification used by the U.S. Geological Survey.

Class	Dissolved solids
	(milligrams per litre)
Fresh	0- 1,000
Slightly saline	1,000- 3,000
Moderately saline	3,000-10,000
Very saline	10,000-35,000
Briny	More than 35,000

Table 9.--Summary of quantitative hydrologic estimates

Component	Hydrologic balance Long-term average in acre-feet per year
Inflow:	
Precipitation (p. 15)	3,100,000
Imported water, net (p.25)	70,000
Total	3,170,000
Outflow:	
Overland runoff (p. 22)	134,000
Irrigation return flows (p. 27)	20,000 30,000 ¹
Ground-water outflow (p. 35)	30,000
Subtotal (rounded)	184,000
Evapotranspiration in subbasin	2,986,000 ²
Ground-water system:	
Recharge:	
From precipitation (p. 28)	100,000
From imported water (p. 28)	20,000
Total	120,000
Discharge:	
Evapotranspiration along waterways (p. 3	3) 83,000
Subsurface outflow (p. 35)	30,000
Seeps and springs (p. 31)	4 , 500
Wells (p. 35)	500
Total	118,000
Recoverable ground water in storage:	Acre-feet
In unconsolidated deposits (p. 30)	190,000
In consolidated rocks ³ (p. 30)	3,000,000
Total (rounded)	3,200,000

¹Includes about 2,000 acre-feet of surface flow to the Green and Strawberry Rivers from individual springs.
²Calculated difference between total inflow and other components

of outflow.

³Upper 100 feet of saturated rock only.

In general, water at the higher altitudes is freshest. There appears to be no clear correlation between water quality and geology, although water from the Uinta Formation, which crops out in the lower altitudes, seems to be consistently more saline. The ratio of individual dissolved constituents seems to be more closely related to the relative concentration of total dissolved solids rather than to the geologic source of the water. The general chemical quality of water in the southern Uinta Basin is shown on plate 3.

Surface water

Table 13 contains chemical analyses of water collected from streams at miscellaneous sites throughout the southern Uinta Basin. Only selected analyses are included in table 13. For regular water-quality stations on the Green, White, and Duchesne Rivers (stations 09307000, 09306500, and 09302000 on pl. 1, and sites 22, 21, and 20 on pl. 3). Additional analyses, beginning in 1950, of water from those sites are available in the files of the Geological Survey.

The discharge weighted average concentrations of dissolved solids in the Green, White, and Duchesne Rivers at sites 22, 21, and 20, for the period 1964-66, respectively, were 457, 484, and 702 mg/l. Recorded concentrations of dissolved solids in the Green and White Rivers generally are less than 1,000 mg/l throughout the year, but the concentrations of dissolved solids in the Duchesne River commonly exceed 1,000 mg/l and occasionally exceed 2,000 mg/l during late irrigation and lowflow periods.

The dissolved-solids concentrations in water samples from streams that head in the southern Uinta Basin ranged from 343 mg/l near the head of Minnie Maud Creek (site 8) to 7,240 mg/l near the lower end of Bitter Creek (site 18). There is a marked increase in the dissolved-solids concentration of water collected from downstream sites (sites 14 and 17) over that from upstream sites (sites 12 and 16) on Hill and Willow Creeks. The higher concentrations of dissolved solids in water in the lower stream reaches is common to all streams sampled; it is attributed to inflow of saline ground water, to irrigation return flows, and to concentration of dissolved solids by evapotranspiration of the stream water.

In the headwater areas, where dissolved-solids concentrations are low, the stream water is of a calcium bicarbonate type, whereas water in the lower stream reaches generally contains magnesium and sodium as the dominant cations, and sulfate is the dominant anion. Exceptions occur during high runoff periods in the lower reaches of streams that drain the extreme western part of the study area. Because of rapid runoff from these relatively short drainage basins, water in the lower reaches is fresh and either of a mixed or calcium bicarbonate type, as indicated by analyses of water from Timber Canyon and Avintaquin Creeks (table 13).

Ground water

Chemical analyses of water sampled from water wells and springs are given in table 14; analyses of water from oil and gas wells and tests are given in table 15. The dissolved-solids concentrations in water sampled from springs ranges from 190 mg/l at Horse Ridge Spring(?) to 7,702 mg/l at Stinking Spring. Water from springs in the headwater areas of the principal streams above an altitude of about 8,000 feet (2,438 m) generally contains less than 1,000 mg/l of dissolved solids, whereas water from springs in the lower altitudes generally contains more than 1,000 mg/l. The high-altitude springs are near their recharge areas, whereas the low-altitude springs sampled are generally far removed from their recharge areas. Therefore, water discharging from the high-altitude springs has had less time of travel in the aquifer system and less opportunity to dissolve minerals.

The dissolved-solids concentrations in water from water wells (including several water-producing oil and gas tests that were converted to water wells) range from 327 mg/l in well (D-13-14)24dba-1, which is the Green River Formation, to 4,480 mg/l in well U(C-4-2)5bba-2, which taps unconsolidated deposits near their contact with the underlying Uinta Formation. The high concentrations of boron, sulfate, and dissolved solids in water from the latter well indicate that the original source of a large percentage of the water is the Uinta Formation.

Waters sampled from most oil and gas wells and tests were collected from depths of more than 1,000 feet (305 m) and generally are slightly saline to briny. (See table 15.) The only freshwater sampled from oil tests was from wells (D-11-12)14baa-1 and (D-14-20)30bab, which tapped the Green River Formation between depths of 635-650 and 1,883-1,910 feet (194-198 and 574-582 m), respectively. These waters contained only 619 and 818 mg/l of dissolved solids, respectively. The dissolved-solids concentration in water from other oil and gas wells and tests listed in table 15, however, ranges from 1,086 to more than 100,000 mg/l.

Plate 3 shows the ranges of dissolved-solids concentrations that can be expected from at least one aquifer in the southern Uinta Basin. It shows that the only areas where fresh ground water generally is available are along the higher south rim of this subbasin.

In many cases, the dissolved-solids concentrations in the ground water increase with depth. Consequently, even at higher altitudes where freshwater is obtained from springs and shallow wells, deep aquifers are likely to contain saline water. For example, although well (D-14-20)30bab produced freshwater from the Green River Formation at a depth of 1,883-1,910 feet $(574-582 \, \text{m})$, well (D-14-20)30ac, less than half a mile $(0.8 \, \text{km})$ to the southeast, produced very saline water from a depth of 3,790-3,820 feet $(1,155-1,164 \, \text{m})$.

There is no clear correlation between the chemical type of ground water and the geologic source of the water in the southern Uinta Basin. Most of the waters containing less than about 1,000 mg/l of dissolved solids are of the calcium bicarbonate or magnesium bicarbonate type (pl. 3), regardless of geologic source. However, most of the freshest waters are from high-altitude springs that discharge from the Green River Formation. Slightly to moderately saline waters generally are of the sodium bicarbonate or sodium sulfate types. Chloride is a minor constituent in water from water wells and springs in the area but is a major constituent in the very saline to briny waters from deep oil and gas wells and tests.

Although not shown by Stiff diagrams on plate 3, table 15 indicates that a number of the more highly concentrated water samples collected from oil and gas wells and tests in the Uinta and Green River Formations, such as U(C-4-5)14dca-1, are of the sodium carbonate type. Similarly, three water samples from Stinking Spring had sodium and carbonate as the principal cation and anion (table 14). All these waters apparently were in contact with evaporite deposits that contain beds of trona, a hydrous sodium carbonate mineral.

Chemical quality in relation to use

Domestic and stock

The U.S. Public Health Service (1962) has established water-quality standards for drinking water which include dissolved mineral constituents among other parameters. The following table lists the maximum limits recommended by the Public Health Service for some of the more common mineral constituents for which analyses are given in tables 13, 14, and 15.

"The following chemical substances should not be present in a water supply in excess of the listed concentrations * * * where other more suitable supplies are or can be made available." (U.S. Public Health Service, 1962, p. 7.)

Substance	Recommended limit
	(milligrams per litre)
Chloride (C1)	250
Fluoride (F)	1.31
Iron (Fe)	•3
Nitrate (NO ₃)	45 (10 mg/1
0.10	expressed as N)
Sulfate (SO ₄)	250
Dissolved solids	500

¹Based on the average maximum daily air temperature of 60.7°F (15.9°C) at Duchesne, Utah (1968-72).

According to the foregoing table most of the waters in the area, except those from the upper reaches of streams and high-altitude springs, exceed the maximum limit of 500~mg/l for dissolved-solids concentrations. The recommended limit of 250~mg/l for sulfate also is exceeded in many of the water sources, and the maximum recommended limit of 1.3 mg/l for fluoride is exceeded in a number of sources.

The generally poor chemical quality of water in the southern Uinta Basin with regard to suitability for domestic use has made it necessary for water suppliers in the population centers of Duchesne, Myton, and Pleasant Valley to import better quality water from the northern Uinta Basin. Water from many sources in the southern Uinta Basin may not be chemically suitable for drinking.

The State of Montana (McKee and Wolf, 1963, p. 113) rates water for livestock on the basis of dissolved solids as follows:

Rating	Dissolved solids (milligrams per litre)
Good	Less than 2,500
Fair	2,500-3,500
Poor	3,500-4,000
Unfit	More than 4,500

According to this rating, water from most springs, water wells, and upper stream reaches is suitable (but only poor to fair in many cases) for livestock. Water from the lower reaches of some streams, such as Bitter Creek (during low flow), an orifice of Stinking Spring, and certain oil and gas wells, may be unfit for livestock. However, cattle are known to drink water with more than 4,500 mg/l of dissolved solids where better water is not available.

Irrigation

Important characteristics that help to determine the chemical suitability of water for irrigation in arid and semiarid areas are the specific conductance (electrical conductivity) and sodium-adsorption ratio (SAR) of the water (see table 13, 14, and 15). Specific conductance is an index of dissolved-solids concentration of the water and SAR is an index of the ratio of sodium to other cations in the water according to the following equation:

$$SAR = \frac{Na^{+}}{\sqrt{\frac{Ca^{++} + Mg^{++}}{2}}}$$

where the concentrations of the ions are expressed in milliequivalents per litre.

The U.S. Salinity Laboratory Staff (1954, p. 69-81) has devised a method of classifying irrigation water by plotting SAR against conductivity of the water in the diagram shown in figure 11. The classification is based on average conditions with respect to soil texture, infiltration rate, drainage, amount of water applied, climate, and salt tolerance of crops.

According to this classification, water from the Green, White, and Duchesne Rivers at water-quality stations 09307000, 09306500, and 09302000 (sites 22, 21, and 20 in table 13) and from the upper reaches of the streams that drain the southern Uinta Basin has a low sodium-medium to high salinity hazard for irrigation under average conditions. However, water from the lower reaches in Willow, Evacuation, and Antelope Creeks probably would have high to very high sodium and salinity hazards, except perhaps during peak runoff periods.

Although waters from the high-altitude springs have a low sodium-medium to high salinity hazard, ground water in the lower altitudes most likely would have a high to very high sodium and salinity hazard as indicated by the analyses of water from spring (D-12-21)19bdd-S1 and well U(C-4-3)9bbd-1 (table 14). It is interesting to note that water from the only well in the southern Uinta Basin known to be drilled specifically for irrigation—well U(C-5-5)34bdd-2—has a high salinity hazard but a low sodium hazard.

Relative concentrations of boron in water also determine the suitability of the water for irrigation. Wilcox (1958, p. 5) has classified plants as sensitive, semitolerant, and tolerant, according to their ability to withstand the toxic effects of various concentrations of boron. Irrigation water with boron in concentrations of less than 0.3 mg/l is considered suitable for even the most boron-sensitive crops such as corn and legumes, whereas water with concentrations of boron in excess of 4.0 mg/l may be unsuitable for the most boron-tolerant plants such as alfalfa.

According to tables 13 and 14, the concentrations of boron in the southern Uinta Basin range from 0.07 to 10.00 mg/l in water from streams and 0.00 to 22.6 mg/l in water from springs and water wells. The concentration of boron in the Duchesne River near site 20 ranged from 0.12 to 2.99 mg/l and averaged 0.75 mg/l in 22 samples collected between 1942 and 1958 (Iorns and others, 1964, p. 586-587). However, the boron concentration may be somewhat lower upstream where water is diverted for irrigation in the southern Uinta Basin. Major contributions of boron to the Duchesne River come from Indian Canyon Creek, which enters the Strawberry River near its confluence with the Duchesne River above the Grey Mountain-Pleasant Valley Canal diversion, and Antelope Creek, which enters the Duchesne River above the Myton Townsite Canal Diversion. (See table 13.)

The initial source of boron apparently is the evaporite deposits in the Uinta and Green River Formations. Seeps and individual springs, such as U(C-5-6)1caa-S1 and S2, probably contribute most of the boron to the streams, and the boron content is concentrated as the streamflow is depleted by evapotranspiration.

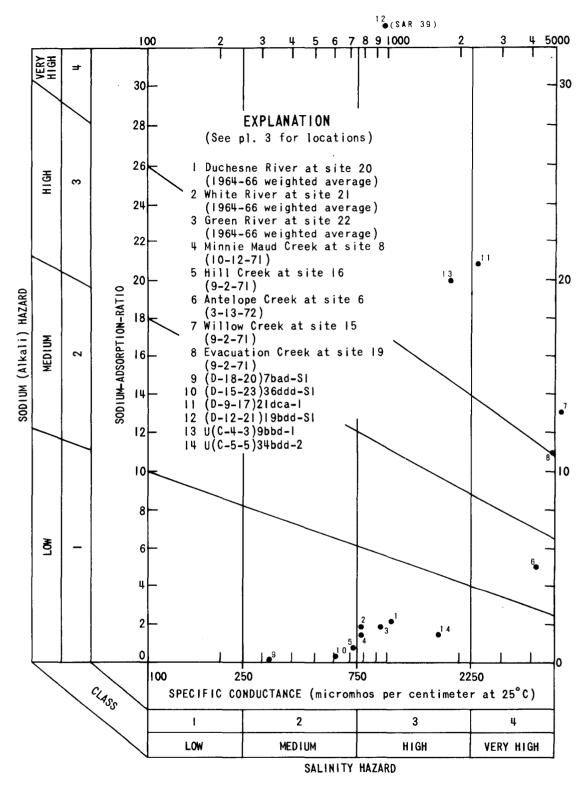


Figure II. - Diagram used to classify water for irrigation. (From U.S. Salinity Laboratory Staff, 1954.)

AVAILABILITY OF WATER FOR FUTURE DEVELOPMENT

The largest future water needs in the southern Uinta Basin most likely will be for development of oil-shale reserves (including related municipal and satellite industrial needs) in this subbasin and for supplementary irrigation. The amount of water needed for oil-shale development is not known, but preliminary estimates given by the U.S. Department of the Interior (1973, Table III-5) indicate that it might range from about 6,000 to 9,600 acre-feet (7.5-11.8 hm³) per year for an oil-production capacity of 50,000 barrels per day. Associated public supply and industrial needs could exceed 1,000 acre-feet (1.2 hm³) per year.

Considerably more irrigation water will be needed in the southern Uinta Basin if all land classified as arable is to be placed under irrigation. Austin and Skogerboe (1970, p. 46-49), for example, indicate that there are about 33,000 acres (13,355 $\,\mathrm{hm}^2$) of arable land on Pariette Bench, along the White River, and in the Green River bottom between the White River and Willow Creek. Most of this land currently is not irrigated. At a crop requirement of 3 feet (0.9 m) per year, the amount of water needed to irrigate all the land would exceed 100,000 acre-feet (123 $\,\mathrm{hm}^3$) per year.

Water to meet some of the potential future needs in the southern Uinta Basin could be obtained by increased utilization of the water supply that originates from precipitation entirely on this subbasin. Development of such a supply would be deterred, however, by such factors as uneven time and areal distribution of the supply and generally poor chemical quality of the water.

The water supply from precipitation on the southern Uinta Basin averaged about 3.1 million acre-feet (3,800 $\,\mathrm{hm}^3$) annually during the period 1941-70. Annual runoff from this subbasin is estimated to average about 134,000 acre-feet (165 $\,\mathrm{hm}^3$). An estimated 3.2 million acrefeet (3,947 $\,\mathrm{hm}^3$) of recoverable ground water is stored in the unconsolidated deposits and upper 100 feet (30.5 $\,\mathrm{m}$) of saturated consolidated rocks in this subbasin, with an estimated average annual replenishable ground-water supply of about 120,000 acre-feet (148 $\,\mathrm{hm}^3$). Although these figures seem quite impressive, only a small fraction of the water is readily available for development.

Runoff is highly irregular; much of it is in intermittent and ephemeral streams and cannot be relied on for large sustained supplies. The only basins in which development of large sustained supplies by regulation seems possible are the Evacuation, Willow, Nine Mile, Range, and Avintaquin Creek basins. Estimated mean annual runoff from these basins totals about 55,000 acre-feet (61.7 hm³) per year (table 6). Reservoir storage of runoff from these basins would provide a supply of high-quality water for use during low-flow periods.

The best potential source for future large-scale development of ground water in the southern Uinta Basin lies in the unconsolidated alluvial deposits along the Green, White, and Duchesne Rivers. These deposits, where saturated, generally are less than 50 feet (15.2 m) thick and are of small extent. Because of their relatively high permeability, however, they seem capable of supporting sustained yields of more than 100 gal/min (6.3 l/s) to large-diameter wells or infiltration systems. The close relation between the surface water and ground water along the major streams in the southern Uinta Basin, however, indicates that such development doubtless would affect streamflow. However, pumping water from the unconsolidated deposits may, by lowering the water table, help to reduce nonbeneficial consumptive use of water by phreatophytes.

The bedrock formations that underlie the southern Uinta Basin are generally not permeable enough to support large sustained withdrawals (more than 500 gal/min or 31.5 1/s) from wells. Much of the Uinta Formation is drained by the deeply incised streams that dissect it, and where it is saturated it yields water slowly to most wells and springs. The Green River Formation seems relatively permeable in the general vicinity of well (D-11-24)7cac-1, but data collected during this study failed to indicate the existence of an extensive permeable "leached zone" such as was reported in the Green River Formation where it underlies the Piceance Creek Basin of Colorado just east of the Uinta Basin (Coffin and others, 1971). The Wasatch and North Horn Formations and sandstone units of the Mesaverde Group appear to be relatively permeable in areas of outcrop in the Range Creek area, but oil-test data indicate that they have low permeability in the subsurface beneath most of the southern Uinta Basin.

A major problem affecting the future development of water that originates from precipitation in the southern Uinta Basin is the generally poor chemical quality of the water. Any plan to develop freshwater supplies for use in the lower parts of this subbasin probably would have to consider conveying the water from higher areas or desalting the water from a local source.

FUTURE STUDIES

The information given in this report provides a general regional appraisal of the water resources of the southern Uinta Basin. Considerable detailed study is needed on a local scale to provide information for better delineation of the chemical quality of the water, for refinement of quantitative estimates given herein, and for evaluation in greater detail of the best potential sources for future development. Additional study may also be required to provide information needed to minimize the effects of oil-shale development on the water quality of the Colorado River system and the environment in general.

Several studies that could be done in the near future are:

- 1. A systematic study of the hydrologic properties of the Green River Formation, with emphasis on the Parachute Creek Member. The Parachute Creek Member contains the richest oil-shale deposits in the area and may contain a permeable "leached zone" beneath the shale similar to that found in the Piceance Creek Basin of Colorado. Such a study would require detailed examination of all available oil-field geophysical data, test drilling, and aquifer tests.
- 2. A detailed study of consumptive use of water by phreatophytes along perennial streams such as Willow and Nine Mile Creeks. Determination of water salvage by phreatophyte eradication or replacement would be included in the study. Such a study would require construction of observation wells and installation of special instruments to monitor streamflow, ground-water levels, evaporation, precipitation, and water quality.
- 3. A qualitative evaluation of the stream-aquifer systems, especially along the Duchesne River.
- 4. A study to determine the feasibility of upstream regulations of such streams as Willow and Nine Mile Creeks to conserve the water of good quality that normally is lost by outflow during periods of high runoff. The study would include evaluation of possible damsites and methods to convey, distribute, and use the water.
- A study to determine means of minimizing the effect of oil-shale development on the chemical quality of the Colorado River systems. Such a study would include examination of sites for surface disposal of spent shale and for evaporation of produced brines. It would also include evaluation of sites for subsurface injection of brines. This would require drilling of injection and observation wells and installation of monitoring equipment to determine the environmental impact and the economic feasibility of subsurface injection.

SELECTED REFERENCES

- Austin, L. H., and Skogerboe, G. V., 1970, Hydrologic inventory of the Uintah Study unit: Utah Water Research Laboratory, Utah State Univ. rept. PRWG-405.
- Bagley, J. M., Jeppson, R. W., and Milligan, C. H., 1964, Water yields in Utah: Utah Agr. Expt. Sta. Spec. Rept. 18.
- Bear, L. R., 1962, Statistical methods in hydrology: U.S. Army Engineer Dist., Corps of Engineers, Sacramento, Calif.
- Burbank, W. S., Lovering, T. S., Goddard, E. N., and Eckel, E. B., [compilers], 1935, Geologic map of Colorado: U.S. Geol. Survey Map, scale 1:500,000 [repr. 1967].
- Cashion, W. B., 1967, Geology and fuel resources of the Green River Formation, southeastern Uinta Basin, Utah and Colorado: U.S. Geol. Survey Prof. Paper 548.
- Cashion, W. B., and Donnell, J. R., 1974, Revision of nomenclature of the upper part of the Green River Formation, Piceance Creek Basin, Colorado, and eastern Uinta Basin, Utah: U.S. Geol. Survey Bull. 1394-G.
- Coffin, D. L., Welder, F. A., and Glanzman, R. K., 1971, Geohydrology of the Piceance Creek structural basin between the White and Colorado Rivers, northwestern Colorado: U.S. Geol. Survey Hydrol. Inv. Atlas HA-370.
- Cruff, R. W., 1975, Estimating mean streamflow in the Duchesne River basin, Utah: Utah Dept. Nat. Resources Tech. Pub. 48.
- Cruff, R. W., and Thompson, T. H., 1967, A comparison of methods of estimating potential evapotranspiration from climatological data in arid and subhumid environments: U.S. Geol. Survey Water-Supply Paper 1839-M.
- Eakin, T. E., and others, 1951, Contributions to the hydrology of eastern Nevada: Nevada State Engineer Water-Resources Bull. 12.
- Feltis, R. D., 1966, Water from bedrock in the Colorado Plateau of Utah: Utah State Engineer Tech. Pub. 15.
- Fenneman, M. N., and Johnson, D. W., 1946, Physical divisions of the United States: U.S. Geol. Survey map.
- Ficke, J. F., Weeks, J. B., and Welder, F. A., 1974, Hydrologic data from the Piceance Creek Basin, Colorado: Colorado Dept. Nat. Resources Water Resources Basic-Data Release 31.
- Fields, F. K., and Adams, D. B., 1975, Temperature and precipitation estimates for northeastern Utah: U.S. Geol. Survey Jour. Research, v. 3, no. 2, p. 131-136.

- Goode, H. D., and Feltis, R. D., 1962, Water production from oil wells of the Uinta Basin, Uintah and Duchesne Counties, Utah: Utah Dept. Geol. and Mineralog. Survey Water-Resources Bull. 1.
- Hagen, R. H., [Chm.], and others, 1971, Comprehensive framework study, Upper Colorado Region, Appendix XV (Water quality, pollution control, and health factors): Pacific Southwest Interagency Committee, Water Resources Council open-file rept., 219 p.
- Hood, J. W. and Waddell, K. M., 1968, Hydrologic reconnaissance of Skull Valley, Tooele County, Utah: Utah State Engineer Tech. Pub. 18.
- Iorns, W. V., Hembree, C. H., Phoenix, D. A., and Oakland, G. L., 1964, Water resources of the Upper Colorado River Basin--Basic data: U.S. Geol. Survey Prof. Paper 442.
- Iorns, W. V., Hembree, C. H., and Oakland, G. L., 1965, Water resources of the Upper Colorado River Basin--Technical report: U.S. Geol. Survey Prof. Paper 441.
- Kinney, D. M., 1955, Geology of the Uinta River-Brush Creek area, Duchesne and Uintah Counties, Utah: U.S. Geol. Survey Bull. 1007.
- McKee, J. E., and Wolf, H. M., 1963, Water quality criteria, second edition: California State Water Quality Control Board Pub. 3-A.
- Moore, D. O., 1968, Estimating mean runoff in ungaged semiarid regions: Nevada Dept. Conserv. and Nat. Resources Water-Resources Bull. 36.
- Mower, R. W., and Nace, R. L., 1957, Water consumption by water-loving plants in Malad Valley, Oneida County, Idaho: U.S. Geol. Survey Water-Supply Paper 1412.
- Price, Don, and Arnow, Ted, 1974, Regional appraisals of the Nation's ground-water resources--Upper Colorado Region: U.S. Geol. Survey Prof. Paper 813-C.
- Ray, R. G., Kent, B. H., and Dame, C. H., 1956, Stratigraphy and photogeology of the southwestern part of Uinta Basin, Duchesne and Uintah Counties, Utah: U.S. Geol. Survey Oil and Gas Inv. Map OM-171.
- Ritzma, H. R., 1957, Tectonic map, Uinta Basin, northeast Utah and adjoining portions of northwest Colorado and southwest Wyoming, in Intermountain Assoc. of Petroleum Geologists Guidebook to the geology of the Uinta Basin, Eighth annual field conference.
- Robinson, T. W., 1958, Phreatophytes: U.S. Geol. Survey Water-Supply Paper 1423.
- Sabatka, E. F., [ed.], 1964, Guidebook to the geology and mineral resources of the Uinta Basin: Intermountain Assoc. of Petroleum Geologists, Thirteenth annual field conference.

- Seal, O. G., [ed.], 1957, Guidebook to the geology of the Uinta Basin: Intermountain Assoc. of Petroleum Geologists, Eighth annual field conference.
- Stiff, H. A., Jr., 1951, The interpretation of chemical water analysis by means of patterns: Jour. Petroleum Technology Tech. Note 84, p. 15-17.
- Stokes, W. L., [ed.], 1964, Geologic map of Utah: Utah Univ.
- Thomas, H. E., 1952, Hydrologic reconnaissance of the Green River in U.S. Geol. Survey Circ. 129.
- U.S. Public Health Service, 1962, Drinking water standards: Public Health Service Pub. 956.
- U.S. Department of the Interior, 1973, Final environmental statement for the prototype oil-shale leasing program: U.S. Dept. Interior release, Vol. I of VI (U.S. Govt. Printing Office Stock No. 2400-00785).
- U.S. Salinity Laboratory Staff, 1954, Diagnosis and improvement of saline and alkali soils: U.S. Dept. Agr. Handb. 60.
- Weir, J. E., Jr., 1970, Geohydrology of the area near WOSCO exploratory hole number 1, Uintah County, Utah: U.S. Geol. Survey open-file rept.
- Wilcox, L. V., 1958, Determining the quality of water for irrigation use: U.S. Dept. Agr. Inf. Bull. 197.
- Woolley, R. R., 1930, The Green River and its utilization: U.S. Geol. Survey Water-Supply Paper 618.

Casing depth: Depth to bottom of casing or to uppermost opening in casing.
Water-bearing zone(s): Character of material; G. gravel; Ls. limestone; S. sand; Sh. shale; Ss. sandstone.
Altitude of land surface: Above mean sea level, as interpolated from U.S. Geological Survey topographic maps.
Water level: F. well flows under unknown artesian head; figures are feet below land surface and are reported, except for those shown to nearest tenth which were measured by the U.S. Geological Survey.
Yield: Reported, rate assumed to be by pumping except (b) bailing or (f) artesian flow; drawdown assumed to be feet below static water level.
Use: D. domestic; I. irrigation; N. industrial; S. livestock; U. unused.
Remarks and other data available: C. chemical analysis of water in table 14; FC, field determination of specific conductance of the water (micromhos per cm at 25°C); I., lithologic log in table 11.

	T	Т	Ι	1	ı ;	Water-b	agring	zonas (s)	T	Wat	er level		ield		
			ļ	(ft)	(in.)	(ft)	earing .	zones (s)		-		-	J		
Location	Owner	Year drilled	Well depth (ft)	Casing depth (f	Casing diameter	Depth to top (f	Thickness (ft)	Character of material	Altitude of land surface (ft)	Feet	Date measured	Rate (gal/min)	Drawdown (ft)	Use of water	Remarks and other data available
(D-9-17)21dca-1	U.S. Bureau of Land	1935	22		48	L ^ ,	16	Ls	5,295	2	971	3	-	0	Excavation at Snyder Spring; soil,
(D-9-20) 20acd-1 (D-10-20) 35bbc-1	Management Sun Oil Co. U.S. Bureau of Land Management	1952 1964	166 5,672	168	13 3/8	140 1,700	15	Ss -	4,780 5,240	- F	-	8b 58f	-	u s	O-6 ft; solid lime, 6-22 ft; C. Water reported salty; L. Former gas-producing well; casing 13 3/8 in. to 168 ft; 5 in. to
(D-10-24)2acc-3	American Gilsonite Co.	1960	31	1.0	30	10	-	s,c	4,955	10	12~21-60	.55	-	N	5,672 ft; C. Representative of several wells that rap alluvium of white River in this area; boulders, 0-22 ft; gravel, 22-31 ft; water from these wells generally is fresh and simi- lar to water in the White River.
(D-11-15) 32dcd-1 (D-11-21) 21caa-1	Preston Nutter Corp. U.S. Bureau of Land	1951	610	460	6 5	350	150	Sh	5,780 5,755	42.9 300	4-11-72 751	25b	50	D S	C. Blue shale, 0-610 ft.
30bdb-1 31bdd-1	Management L. M. Thorne Golden Hatch	1934 1952	18 711	- 610	48 4	- 701	10	- Ss	5,139 5,190	16 F	- 8-31-71	- 2 f	-	S S	C. I
(D-11-24)6dbc-1	U.S. Bureau of Land Management	1962	5,950	223	13 3/8	1,210 1,350	30 20	-	5,196	F	-	-	-	S	Former gas-test well; casing 13 3/8 in. to 223 ft; 9 5/8 in. to 2,207 ft; 4½ in. to 4,598 ft; water
7cac-1	do	1962	5,840	216	13 3/8	1,159	241	-	5,268	F	^	175 f	•	Ţi	enters well through annulus between 45 and 9 5/8 in. casing; C. Former gas-test well; casing 13 3/8 in. to 216 ft; 9 5/8 in. to 2,396 ft; water enters well through annulus between 13 3/8 and 9 5/8
33dec-1	do	1936	82	-	-	80	2	Ls	5,780	72	236	8	-	U	in. casing; C. Abandoned mine shaft; water reported good; appeared to be also abandoned as well 9-1-71; L.
(D-12-19)13cad-1 (D-12-22)34abc-1 (D-13-14)34dba-1	Willis Stevens	1961	120	20	20	-	-	-	5,505 6,230	54.9 78	9- 2-71 461	-	-	U	L.
(D-13-14) 24dba-1 (D-13-21) 15ddc-1	Pan American Petroleum Corp. Willis Stevens	1961	52	52	6	35	17	3,8	8,225 5,590	150 35	766 461	-	-	li.	Assumed to be water supply for oil- test drilling; C. Soil, 0-6 ft; silt and gravel, 6-29 ft; sand and coarse gravel 29-52
22aab-1	do	1961	40	15	5	18	7	S,G	5,600	10	461	-	-	U	ft; water reported brackish. Water reported brackish; L.
(D-14-18)1bbd-1	Ute Indian Tribe	1964	130	14	8	-	-	-	7,045	68.9	8- 8-72	3	-	S	Original depth, 212 ft; temperature
(D-14-19) 3cdb-1 (D-14-22) 26aca-1	do Willis Stevens	1960 1959	96 150	65	5 -	-	-	-	6,880 7,080	80	1260	5	96	S	13.0°C; FC, 7,000; L. L. Reportedly a dry hole; sand, 0-21
(D-15-20)3bab-1	Ute Indian Tribe	1960	108	60,	5		-	Ss	7,440	52	1260	15ъ	-	S	ft; blue shale, 21-150 ft. Water reportedly contained 280 mg/1
12cca-1	do	1964	120	12	8	-	-	-	7,425	60	664	4ъ	60	U	of dissolved solids; L. Sandstone, 0-60 ft; shale, 60-120 ft; water reported good.
U(C-3-1)33cbc-1 U(C-3-5)31dcd-1	John Uresk D. T. Jones	1967 1969	20 200	20 42	6	31	169	S,G Sh	5,045 5,790	24	769	9	- 169	D D	Temperature 10.0°C; FC, 2,200. Casing 8 in. to 31 ft; 6 in. 31-42 ft; C.
U(C-4-1) 7ccb-1 17ccc-1	R. J. Marti Ken Higley	1949 1951	36 25	16 15	6 48	16 24	9 1	S,G S	5,182 5,155	16 10	449 351	12ь 30ь	- 5	U D	L. Blue clay, 0-24 ft; sand, 24-25 ft;
18dcc-1	C. Van Tassell	1945	80	15	6	15	5	s,G	5,185	15	445	60 b	10	U	water reported hard. L.
28aba-1	Louis Roberts	1948	150	20	6	125	-	Sh	5,155	20	1048	15b	10	U	Topsoil, 0-10 ft; blue shale 10-
U (C-4-2) 2cda-1	Salt Lake Pipe Co.	1950	108	91	12	93	1	Ss	5,295	25	650	25	49	U	150 ft. Water "very salty"; original depth, 700 ft; L.
5abb-1 5bba-2	Guy Giles Lamar Neilson	1945 1935	23 40	20	6 8	21 5	2 27	G S,G	5,180 5,185	8 1.8	445 3- 9-71	20	- 2	U D	I Formerly reported as 4-bba-1. Original depth, 1,120 ft; hydrograph in figure 10; C, L.
13daa-2 14bbb-1	Alden Kynaston Marion Ross	1969 1954	28 65	28 50	6 6	63	2	Sh Ss	5,195 5,237	16.7 24	5- 6-72 1254	20 b 8 b	25 16	s u	Clay, 0-6 ft; shale, 6~28 ft; C. Boulders, gravel, and sand, 0-36 ft; shale and sandrock, 36-65 ft.
14bcc-1 U(C-4-3)4daa-1 9bbd-1	J. E. Wilkens Jack Liddell Latter-day Saints Church	1957 1953 1966	80 55 70	33 46	6 6	10 15 63	8 15 7	G S,G Ss	5,245 5,277 5,327	10 18 30.7	1157 1253 5- 6-72	10ь 12 10ь	5 5 30	D D	L. Reportedly yields soft water; L. C, L.
10 aba-1 10abb-1 10cbb-1	John Liddell Roger Hicken Willis Shepard	1946 1953 1948	250 180 56	81 70 56	6 4 7	71 - 40	- 16	Sh - S,G	5,282 5,280 5,325	12 12 38	546 1253 1248	2 10b 30b	- 4 2	D S D	Temperature 10.0°C; FC, 2,900; L. Temperature 12.0°C; FC, 2,450. Clay, 0-40 ft; sand and gravel,
11dcb-1	R. D. Peatress	1945	95	43	6	45	~	Sh	5,310	31	445	4ъ	13	D	40-56 ft; C. Well reportedly goes dry in late winter; temperature 11.5°C; FC, 2,750; L.
12aca-1 12cab-1	Robert Alred Wallace Pitt	1945	40 70	37	6	37	- 3	G -	5,265 5,291	23	345	20b	0	D D	FC, 860; L. C.
16acb-1 U(C-4-4)1daa-1	D. W. Covington	1964	67 43	62	6		22	S,G G	5,405	44.8	5- 6-72° 761	12b 10b	44 8	D D	Sand and gravel, 0-62 ft; sandstone, 62-67 ft; temperature 10.0°C; FC, >8,000; water not used for drinking. Silt, 0-18 ft; gravel and cobbles.
17acb-1	Carter Oil Co.	1951	7 1 5	-	_	701	2		5,850	285	_	18ъ		ti	18-40 ft; bedrock, 40-43 ft; FC, 720. Well yielded briny water; plugged
						*	-	.,	-,	-03			-	v.	and abandoned.

Table 10.--Records of selected water wells - Continued

					in.)	Water-be	aring ze	one(s)		Wa	ter level		Yield		
U(C-4-7) 14aaa-1 17dbc-1 35dcd-1	Owner	Year drilled	Well depth (ft)	Casing depth (ft)	Casing diameter (Depth to top (ft)	Thickness (ft)	Character of material	Altitude of land surface (ft)	Feet	Date measured	Rate (gal/min)	Drawdown (ft)	Use of water	Remarks and other data available
U(C-4-6) 9abb-1	Peatress	1948	25	20	6	22	3	S	5,748	16	1248	8	4	D	Original depth, 120 ft but plugged back because it produced "very bad" water with gas; temperature 11.0°C; FC, 1,340; L.
U(C-4-7)14aaa-1	Pender Ranch	1947	12	12	4	-		-	5,875	-	-	-	-	D	Temperature 9.0°C; FC, 1.050.
	Sam Mort	1944	19	15	6	12	-	G	5,945	7	1144		-	D	Temperature 11.0°C; FC, 660.
	Thomas Olsen	1948	500	-	4	-	-	-	6,960	84	-	15	-	U	Casing pulled, well abandoned; L.
U(C-5-5)34bdd-1	W. C. Foy	1960	170	169	6	170	-	G	6,740	F	760	120	21	-	Water reportedly of good quality; L.
34hdd-2	do	1961	161	65	12	-	-	-	6,610	F	-	300	18	I	Reported flow, 12 gal/min on com- pletion; found flowing about same rate 4-13-72; C. L.
U(C-5-8)25aab-1	Thomas Olsen	1948	175	155	4	165	6	Ss	7,599	140	748	5	15	S	L.

Table II.--Selected drillers' logs of wells

Allitudes are in feet above sea level for land surface at well as interpolated from U.S. Geological Sorvey 75-min to topographic maps. Thickness, in feet.

Depth, in feet below land surface.

Material	Thickness	s Depth	Material	Thickness	Depth	Material	Thickness	Depth
(D-9-20) 20acd-1. Log by Garnett			U(C-4-1) 18dec-1. Log by J. C.			U(C-4-3)10sha-1 Continued	7	11
Birchell, 1952, Alt. 4,780 ft. Topsoil	. 3	3	Zimmerman. 1945. Alt. 5,185 ft. Clay, yellow	2	2	Shale, hard, with thin shells Shale, sandy	30	14
Shale, blue	3.5	60	Sand and gravel	18	20	Shale, blue, sticky	35 8	18 18
Sandstone, gray	. 13	/3	Glay, blue	60	80	Sandstone, soft		19
Shale, blue; interbeds of brown shale	4.1	140	U(C-6-2)2cda-1 Log by Rovinson			Shale, sandy	10	20
andstone, soft, light; salty water .	. 20	165	Drilling Co. 1950. Alt. 5,295 ft.	-		Shale, brown, hard	2 43	20 24
ot reported	. 1	166	Topsoil		10	Shale, blue		25
(D-9-20)27aac-1. Log by De Kalb			Gravel, coarse, boulders, and little			Share, brown		
Agricultural Association, 1959.			clay	4	14	U(C-4-3)11dcb-1. Log by Klippel		
Alt. 4,845 ft.	4	7.0	Gravel and boulders; some water		18 22	Bros. 1945. Alt. 5,310 ft.	2	
May, varicolored, and silt Sand, fine to coarse, light green		4±0 470	Sandrock		33	Boulders and yellow clay		i.
imestone		500	Sandrock	2	35	Clay, yellow	13	2
lay, silt, and sand, light gray		530	Clay, blue	13 6	48 54	Shale, gray		3
lay, silt, and sand, gray, green,	. 90	620	Sandrock		60	Shale, gray, crumbly		4
and purple		630	Clay, blue and red	. 5	65	Shale, gray		9
lternating shale, siltstone, and			Clay, blue	28 1	93 94	U(C-4-3)12aca-1. Log by Klippel		
sandstone beds	. 660	1,290	Sandrock; water bearing		100	Bros. 1945. Alt. 5,265 ft.		
male, silty, brown, and dotomite, "oil"; water at 2,720 ft	. 1,670	2,960	Clay, sandy, blue, with hard shells.	11	111	Topsoil	2	
lay, silt, and sand, light gray	. 110	3,070	Shale, blue		134 143	Clay sandy, with boulders		1
imestone, gray and gray green	. 210	3,280	Shale, red		160	Clay, sandy		3
day, silt, and sand, light gray, green gray, and tan	. 40	3,320	Shale, sandy, blue	41	201	Gravel, medium; water bearing	3	4
lay and silt, gray, green, and tan,			Sandrock	4	205	Clay, heavy	-	-
with trace of sandstone	. 320	3,640	Shale, sandy, blue	145 5	350 355	U(C-4-6)9abb-1. Log by Klippel		
olomite and limestone, tan	. 60	3,700	Shale, sandy, red		370	Bros. 1948. Alt. 5,748 ft.		
light grage,	. 280	3,980	Shale, sandy, blue	32	402	Alluvium		2
ilt and sand, white and light gray,		,	Shale, sandy, brown		407 417	Sand; water bearing		2
friable and colitic; water bearing		4,030	Shale, sandy, blue		428	Sand, black		9
lay, silt, and sand, gray and green. with trace of limestone		4,960	Shale, sandy, blue		510	Shale, slatey gray		6
lay, tan, dense; fossils(?)	. 100	5,060	Shale, sandy, brown	70	580	Limestone, shelly		6
lay and silt, varicolored	. 75	5,135	Shale, blue		600 615	Shale, slatey gray		7
D-11-21)31bdd-1. Log by C. W.			Shale, brown		670	Sand, black; water bearing		12
Anderson. 1952. Alt. 5,190 ft.			Shale, red	10	680			
'opsoil	. 15	15	Shale, blue	20	700	U(C-4-7)35dcd-1. Log by Klippel Bros. 1948, Alt. 6,960 ft.		
Travel; water (salty) bearing Shale, dark red		250 500	U(C-4-2)Sabb-1. Log by Klippel			Alluvium	36	3
hale, blue		698	Bros. 1945. Alt. 5,180 ft.			Sandstone, brown	6	4
andstone, porous		711	Topsoil		6	Limestone		5) 6:
00 11 943 22 days 7 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1			Clay, sandy	7 8	13 21	Sandstone, brown		84
(D-11-24) 33dcc-I. Log by C. M. Erb. 1936, Alt. 5,780 ft.			Gravel, coarse; water hearing	2	23	Sandstone, black; water bearing	12	91
Soil and gravel		1.5				Limestone		117
imestone		72	U(C-4-2) 3bba-2. Log by Ellery			Shale, sandy, yellow		164 181
Gilsonite, low grade		80 82	Grant. 1935. Alt. 5,185 ft. Soil, clayey	5	5	Unknown		184
the ned, tractited, which hearing.			Sand and gravel; water bearing		32	Sandstone, gray	11	19
(D-12-22)34abc-1. Log by Everett			Clay, blue		37	Limestone		21
Osborne, 1961, Alt. 6,230 ft.	. 12	12	Sand; water hearing		61 160	Shale, sandy, yellow		25. 26
Sand, gravel, and conglomerate Shale, blue gray		78	Shale, blue		166	Shale, sandy, yellow		29
Sandstone, gray	. 24	102	Shale, blue	302	468	Sandstone, red		32
Shale, green and buff	. 18	120	Sandstone		492	Shale, sandy, yellow		36 41
(D-13-21) 22aah-1. Log by Everett			Slate rock		500 542	Sandstone, black, hard		45
Osborne, 1961, Alt. 5,600 ft.			Unknown	578	1,120	Shale, bentonitic	29	48
Copsoil		. 8	(Well plugged back to 40-foot depth)			Sandstone, yellow, hard		48 50
lay, silty, sandy	. 10	18 25	U(C-4-2)14bcc-1. Log by Uintah Basin		1	Shale, bentonitic	12	.10
(ud and silt, blue	. 15	40	Drilling Co. 1957. Alt. 5,245 ft.			U(C-5-5)34bdd-1. Log by Uintah Basi	n	
6 1/ 10 11 1 2 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1			Topsoil		10 18	Drilling Co. 1960. Alt. 6,740 ft.	12	1
<u>D-14-18)1bbd-1</u> . Log by Uintah Basir <u>Drilling Co.</u> 1964. Alt. 7,045 ft.	1		Gravel		80	Sand, silty		16
lay and sand		14			- 1	Not reported		1.7
Bedruck	. 32	46	U(C-4-3)4daa-1. Log by Uintah Basin			WAY C CARABAR 2 To be Wines Pro-1		
andstone		52 160	Drilling Co. 1953. Alt. 5,2 7 ft, Clay	15	15	U(C-5-5)34bdd-2. Log by Uintah Basi Drilling Co. 1961. Alt. 6,610 ft.	d.	
hale; oil bearing		212	Gravel and sand,	25	40	Soil and clay		2
			Clay, blue		55	Clay		6
D-14-19)3cdb-1. Log by Uintah Basin	1		U(C-4-3)9bbd-1. Log by Uintah Basin		}	Gravel		7
Drilling Co. 1960, Alt. 6,880 ft. Sedrock and clay,	. 10	10	Drilling Co. 1966. Alt. 5,327 ft.			Gravel	4	8
hale, gray	. 26	36	Clay		8	Clay , , , . , ,	7	8
hale, gray and green	. 44	80 84	Clay and gravel	26	15 41	Gravel	8	9 10
and, white		94 9h	Sand and cobbles		63	Clay	5	10
			Sandrock		70	Gravel ,	2.5	13
D-15-20)3bab-1. Log by Uintah Basic Drilling Co. 1960. Alt. 7,440 ft.	1		U(C-4-3)10aba-1. Log by Klippel			Clay and sand	5 8	13 14
lay and rock	. 7	7	Bros. 1946. Alt. 5,282 It.			Shale; oil bearing	4	14
Sandstone, yellow	. 57	64	Topsoil	18	18	Rock, solid		15
Sand, white		67 105	Sand and gravel		32 38	Shale; oil bearing	11	16
andstone, yellow		105	Shale, blue	р	38	U(C-5-8)25aab-1. Log by Klippel		
	,	100	gravel.,,	33	71	Bros. 1948. Alt. 7,599 ft.		
(C-4-1)7ccb-1. Log by Garnett			Shale, blue	3	74	Alluvium		11
Birchell. 1949. Alt. 5,182 ft.	.,	• /	Sandstone	1	75	Sandstone		15 16
Copsoil and gravel, , , ,		16 25	Shale, gray, rotten	1 1	76 77	Shale, sandy, gray		17
Sand and gravel		36	Shale, sandy, gray	31	108	Sandstone, hard		175
Clay, blue								

Table 12. -- Records of selected springs

Altitude of land surface: Above mean sea level as interpolated from U.S. Geological Survey topographic maps.

Geologic source: Qay, unconsolidated deposits; Tu, Uinta Formation; Tgp, Parachute Creek Member, Green River Formation; Tw, Wasaich Formation; KTnh, North Horo Formation.

Discharge: Rate estimated or measured (m) by U.S. Geological Survey; otherwise reported (t) by owner or user; <, Jess than.

Use: D, domestic; I, irrigation; S, livestock; U, unused.

Remarks and other data available: C, chemical analysis of water in table 14; FC, field determination of specific conductance of the water (micromhos/cm at 25°C).

		Ì		1 .	Discharge		l	
Location	Name or owner	Altitude of land surface (ft)	Geologic source	Rate (gal/min)	Temper- ature (°C)	Date	lise	Remarks and other data available
(C-10-17) 12haa-S1	Unknown	5,420	Tu	<0.5	-	3-16-72	-	Undeveloped; probably intermittent and used by live- stock; C.
D-11-15) 15dbb-S1	do	6,660	Tgp	<.5	-	3-16-72	-	Do.
D-11-17) 20aca-S1 D-11-18) 20cba-S1	do do	5,600 4,800	Tgp Tgp	∗5 1		3-16-72 3-16-72	s	Do. Undeveloped; rises from streambed, nearby seeps
								along canyon walls; C.
D-12-21)19bdd-S1	Sulphur Spring	5,335	Tgp	20	19.5	8-30-71	U	Part of flow is collected in small tank that over- flows to marshy area; entire flow is consumed by rushes and other vegetation in the general area; C.
D-13-14) 24adb-S1	Pan American Oil Corp.	8,275	Tgp	-	-	-	-	c.
D-13-19)8aa-S1 D-13-23)27acd-S1	Unknown do	6,150 6,180	Tgp Tgp	. 25	-	8- 8-72 4-12-72	÷	FG, 2,200. Undeveloped; probably intermittent and used by live- stock; C.
D-13-25) I 3add-81	Mud Spring	6,475	Tw	Dry	-	9- 1-71	U	Formerly used for domestic and stock supply; report-
17bdh-S1	Flat Rock Spring	7,230	Tgp	Dry	-	9- 1-71	-	edly dry in recent years. Reportedly dry in recent years.
29bab-S1	Indian Spring	7,050	Tgp	2	11.5	9- 1-71	S	Piped to stockwatering troughs; reported to yield as
D-14-14)4abd-S1	Pan American Oil Corp.	9,500	Tgp	_	_	_	_	much as 10 gal/min; C.
D-14-19) 33aad-S1	Charlie Brown Spring	7,120	Tgp	<.5	-	9- 2-71	S	Piped to two stockwatering troughs; C.
D-14-22) 25cac-S1	Pine Spring	7,060	Tgp	4.5m	8.0	8- 9-65	S	Piped to stockwatering trough; discharge measured by U.S. Bureau of Land Management; C.
D-14-24) 21ccc-S1	Unknown	6,580	Tgp	10	10.0	9-12-72	S	Piped to stockwatering trough; C.
D-15-19)4bba-S1	Secret Spring	7,190	Tgp	5	-	9- 2-71	-	Undeveloped; almost completely desiccated when visite C.
D-15-20) 15bbd-S1 D-15-23) 36ddd-S1	Flat Rock Spring PR Spring	7,240 8,010	Tgp Tgp	.13m 5.6m	8.5	8-31-71 9-17-64	S S	Piped to stockwatering trough; C. Piped to stockwatering trough; discharge measured by U.S. Bureau of Land Management; C.
D-15-25) 7bcc-S1	Unknown	7,438	Tgp	. 2m	10.5	9-23-73	S	Piped to stockwatering trough; C.
D-16-16)31aaa-S1	Waldo Wilcox	5,590	Qay	15	11.0	4-11-72	I	Flows directly to Range Creek; discharge reportedly increases in response to irrigation upvalley from spring; FC, 860.
32dda-S1	do	5,430	Tw	150 r	11.0	4-11-72	I	Piped from collector box to nearby field; owner measured discharge of 150 gal/min and reported the
D-16-17)3c-S1	Camel Rock Spring	4,800	Tw	225	-	9-25-48	-	rate to be fairly constant throughout the year; C.
0-16-18) 24bcd-S1	Pinto Springs	7,925	Tgp	⊲	-	8-31-71	S	Discharges to small ravine which appears to gain in flow along about a 50-foot reach; water ponded for
D-16-22) 23dcd-S1	Cedar Camp Spring	7,900	Tgp	5		7- 2-60	D,S	stockwatering; C. Piped to stockwatering trough; discharge measured by
D-17-16) 10cac-S1	Waldo Wilcox	5,040	KTnh	6r	-	-	D	U.S. Bureau of Land Management. Combined flow of (D-17-16)10cac-S1 and 10cca-S1
10cca-S1	do	5,040	KTnh	6r	_	_	D	piped to several ranch houses for culinary use; C.
15hac-S1	do	5,030	KTnh	<1	11.5	4-11-72	Ü	Undeveloped; discharges from fractured rock directly into Range Creek; FC, 1,000.
D-17-17) 20ccc-S1 D-17-19) 9aca-S1	Unknown Bolon Spring	4,240 8,400	KTnh	5	-	- 8-31-71	s	C. Ponded just below spring area for livestock watering:
			Tgp	,	-			FC, 400.
28bab-S1 28cbb-S1-18-19	Seeley Spring Unknown	8,920 8,710	Tgp Tgp	1.7m 5	6.0 5.0	8-31-71 8-31-71	S S	Piped to small pond; C.
0-18-20) 7had-S1	Marble Spring	8,970	Tgp	7m	5.0	8-31-71	s	Piped to stockwatering trough; C.
C-4-6) 17cdc-S1	M. N. McKinnon	6,030	Tu	450r	11.0	9- 3-71	-	Largest of several springs diverted to fish culture
(C-4-7) 14 aac- S1, 14bcd-S1,	Stinking Spring	5,880	Tu	5	14.5	5-15-60	ft	<pre>ponds; C. Discharges from a number of openings into a marshy area on flood plain of the Strawberry River; C.</pre>
and 14bdd-Sl 21daa-Sl	Unknown	6,160	Tu	500	8.0	4-10-72	U	Spring rises from streambed; sinks back into stream-
22ccb-S1	do	6,220	Tu	5	5.0	4-10-72	U	bed within about half of a mile from source; C. Melting snow directly above spring area when sampled;
								С.
C-4-9)35add-S1	do	7,515	Tu	50	5.0	4-10-72	-	Undeveloped; probably used by stock; melting snow directly above spring area when sampled; C.
(C-5-6) 1caa-S1 1caa-S2	do do	6,240 6,220	Tu Tu	30 60	10.5 9.5	5-15-60 5- 5-60	-	C. C.
C-5-7) 12cda-S1	do	6,880	Tu	-	-	-	-	c.
18acd-S1	-	7,450	Tu	<1	4.0	4-10-72	S	Melting snow directly above spring; water piped to storage tank and hence to stockwatering trough; C.
C-5-10) 10dcb-S1	Big Beaver Spring	9,360	Tu	.lm	7.5	9-17-72	S	Piped to stockwatering trough; C.
C-5-12) 25aad-S1 C-7-8) 1acd-S1	Race Track Ross Station Spring	8,600 8,290	Tu	17r 5	9.0	- 8- 9-71	S S	Has concrete headbox. Piped to stockwatering trough.
(C-7-9) 9dcd-S1	Horse Ridge Spring(?)	9,770	Tgp Tgp	-	-	U- 9+/1	-	Assumed to be Horse Ridge Spring from reported genera location; C.

Discharge: e, estimated; m, measured. Sodium: Where no value is reported for potassium, Na + K has been calculated and is reported as sodium.

2 3 4 5 6 7 8		1		1	[Milligrams
(see	Stream	Date of collection	Temper- ature (°C)	Discharge (ft ³ /s)	Silica (SiO ₂)	Calcium (Ca)	Magnesium (Mg)	Sodjum (Na)	Potassium (K)	Bicarbonate (HCO3)	Carbonate (Co3)	Sultate (SO ₄)
1	Timber Canyon Creek	4-10-72	-	-	28	4.7	34	40	1.6	366	6	29
2	Avintaguin Creek	4-10-72	_	_	24	43	31	56	1.8	350	0	60
	Indian Canvon Creek	5- 7-58	-	12m	34	50	59	149		526	0	226
		9-3-71	10.0	Зе	2.7	7.6	140	490	7.9	948	0	1,000
4	Sowers Creek	4-13-72	2.0	3 e	39	78	12	93	5,2	439	0	320
5	do	4-13-72	4.5	3e	28	170	170	290	8.2	549	0	1,200
6	Antelope Creek	3-13-72	11.0	Зе	26	200	270	450	11	573	0	2,000
7	Pariette Draw	3-16-72	7.0	10e	11	210	130	1,100	4.5	345	0	2,800
8	Minnie Maud Creek	5- 6-58	-	107m	19	59	27	29		294	-	69
		8-27-58	-	1.4m	18	51	42	60		329	-	145
		10-12-71	9.5	, 6m	18	56	44	61	1.8	350	0	150
9	do	5~ 6-58	-	211m	23	60	3.2	42		338	-	84
		6-12-58	-	2.0m	19	58	94	168		606	0	361
10	Rock Creek	6-19-47	-	5 , 7m	26	4.7	28	7.2		270	-	53
		9-19-47		5.5m	•	53	35	30		301	-	81
11	Range Creek	4-11-72	13.5	2-3e	20	52	60	110	1.8	471	0	190
12	Willow Creek	9-21-/2	19.0	2,85m	1 7	59	51	97	2.6	396	0	240
13	do	9-28-72	14.5	, 25m	11	63	230	1,100	6.3	909	. 82	2,500
14	do	9-28-72	12.5	.08m	10	74	230	1,100	5.7	965	61	2,500
15	do	9-2-71	17.0	-	15	62	190	930	8.7	831	0	2,300
16	Hill Creek	9-2-71	17.0	2e	18	72	40	34	2.0	417	0	82
17	do	9- 2-71	16.5	le	12	42	210	1,000	6.4	960	υ	2,300
18	Bitter Creek	4-12-72	18,5	1e	.4	330	610	990	10	410	0	5,000
19	Evacuation Creek	9-2-71	25.0	.05e	15	160	160	830	8.9	400	0	2,500
20	Duchesne River	(1/)	-	-	-	-	-	186	•	266	0	292
21	White River	(1/)	-	-	-	-	_	7.2	_	206	_	149
		5-4-73	7.5	700m	14	67	26	62	2.4	224	O	180
22	Green River	(<u>1</u> /).	-	-	-	~	-	59	-	189	-	170
		4-6-66	9.0	8,240m	10	46	22	39	4.1	162	0	120
		10 - 3 - 66	14.0	2,910m	5.8	7.7	34	80	3.5	208	0	266

 $[\]underline{1}/$ Constituents are discharge-weighted averages for water years 1964-66 .

analyses of water from streams

er litre		,				_					Specific	ĺ	1
Chloride		Nitrate (NO ₃) +	Nitrate	Phosphate	Boron	fron	Manganese	Dissolved	Hardness as	CaCO3	conductance	Sodiam-	
(C1) (F)	(F)	Nitrite (NO ₂) as N	(NO ₃)	(P0 ₄)	(B)	(Fe)	(Mn)	solids (calculated)	Calcium (Ca), Magnesium (Mg)	Non- carbonate	(micromhos/ cm at 25°C)	adsorption ratio	į,
5.1	-	-	-	-	-	-		371	260	0	584	1.1	- 8
8.0	0.4	0.10	-	0.09	0.30	0.04	0.01	397	230	0	630	1.6	8
14	-		2.6	-	2.7	-	-	806	365	0	1,180	3.4	8
49	.8	1./0	-	, 12	10.00	.16	.05	2,270	770	U	3,090	1.7	8
12	-		-	-	-	-	-	835	490	130	1,160	1.8	1
48	-	-		-	-	-	-	2,183	1,100	670	2,810	3.8	ł
97	2.4	1.60	-	.06	7.80	.05	.00	3,350	1,600	1,100	4,170	4.9	
230	1.1	7,40	-	.06	2.20	.02	.00	4,690	1,100	780	5,730	15	ě
3.5	-	w	2.3	-	-	-	-	343	258	1.7	570	, 8	1
6.0	-	*	. 5	-	-	-	-	465	298	28	750	1.5	
7.8	. 3	0	-	.03	. 10	.03	.01	511	320	34	788	1.5	
5.0	-	-	2.2	-	-	-	-	296	282	5	658	1.1	
15	-	-	4.1	-	-	~	-	1,000	532	3.5	1,470	3.2	
80	-	~	1.0	-	-	-	-	440	232	12	513	2.1	
6.0	-		1.2	-	-	-	-	354	276	30	585	.8	
13	. 4	. 15	-	,12	.11	.01	.01	680	380	0	1,040	2.5	
9.0	-	-	-	-	-	-	-	670	3.00	32	1,010	2.2	
120	-	-	-	_	_	_	-	4,360	1,100	220	6,000	14	
120	-	-	-	-	-		-	4,580	1,100	240	5,970	14	
76	.4	.21	-	.15	6.50	.12	.04	4,000	940	260	5,190	13	
3.8	. 1	.00	-	. 15	.07	.07	.03	457	340	2	712	.8	
100	.3	.12		.28	5.80	.02	.02	4,150	970	180	7,250	14	
88	16	.58	-	.00	2.60	.04	.03	7,240	3,300	3,000	7,520	7.5	8
44	. 3	.62	-	.15	.41	.03	.05	3,900	1,100	730	4,820	1.1	8
49	-	-	-	-	-	-	-	702	346	154	1,003	2.2	- 7
58	-	-	-	-	_	-	_	484	250	81	756	1.9	,
35	. 4	. 20	-	.15	.09	-	-	499	270	91	774	1.6	
28	-	-	-	-	-	-	-	457	245	89	684	1.6	ij
18	. 4		2.7	-	.08	-	_	356	206	73	540	1.2	7
38	.4		6.3	-	.17	-	-	651	330	159	932	1.9	,

Table 14. -- Chemical analyses of water

Geologic source: Qay, unconsolidated deposits; Tu, Uinta Formation; Tgp, Parachute Creek Momber, Green River Formation; Tgu, Green River Formation, undivided; Tw, Wasatch Formation; KTnh, North Horn Formation.

Sodium: Where no value is reported for potassium, Na + K has been calculated and is reported as sodium.

Location	0717	ca Calcium	T Warrant	Sodium	T no	1 02		filligrams
Management Unknown	Silica (SiO2)		Magnesium (Mg)	(Na)	Potassium (K)	Bicarbon- ate (HCO3)	Carbon- ate (CO ₃)	Sulfate (S04)
D-10-203 Shbc-1 U.S. Bureau of Land Management Denominate Corp. Tgp 3-10-72 -	11	20	16	510	2.2	467	0	720
O-11-15 15dbh-5 O-11-17 20aca-5 Unknown Tgp 3-16-72 -	14 15	60 .0	27 1.3	980 859	5,1	571 1,420	0 189	1,600 9.1
(D-11-18)20cha-S1	37 22	32 75	29 100	810 170	5,6 2,8	983 726	0	980 360
D-11-21)31bdd-1	29	75 78	63 73	1,000	6.2	690 809	0	1,800
(D-11-24) 6dbc-1	15	.7	.7	370	.9	562	65	220
(D-12-21)19bdd-S1 (D-13-14)24adb-S1 (D-13-14)24adb-S1 (D-13-23)27acd-S1 (D-14-22)25ca-S1 (D-14-22)25ca-S1 (D-14-22)25ca-S1 (D-14-22)25ca-S1 (D-14-22)25ca-S1 (D-14-22)25ca-S1 (D-14-22)25ca-S1 (D-14-22)25ca-S1 (D-14-23)25ca-S1 (D-14-23)36dd-S1 (D-15-23)36dd-S1 (D-15-13)3c-S1 (D-16-16)324ba-S1 (D-16-16)324ba-S1 (D-16-17)3c-S1 (D-16-18)24ba-S1 (D-16-18)24ba-S1 (D-16-18)24ba-S1 (D-16-18)24ba-S1 (D-16-18)24ba-S1 (D-16-18)25bb-S1 (D-16-18)25bb	12	3.2	. 5	438		644	o	334
D-13-14)24adb-S1	12	3.2	.5	418		691	0	310
244ba-1	15	1.6	. 6	230	.8	353	32	150
D-13-23)27acd-S1	-	73	31	25	1.0	415	0	15
(D-14-14) Aahd-S1	-	59	29	30	1.0	366	0	20
D-14-14)4abd-S1	17	160	200	410	7.3	576	0	1,500
CD-14-19)33aad-S1	24	150	110	140	. 7	308	0	850
D-14-22)25cac-S1	-	36	60	37	1.0	293	0	153
(D-16-24)21ccc-S1 Unknown Tgp 9-13-72 10.0 (D-15-19)4bha-S1 Secret Spring Tgp 9-2-71 - (D-15-20)15bbd-S1 Flat Rock Spring Tgp 8-31-71 17.0 (D-15-23)36ddd-S1 PR Spring Tgp 9-17-64 8.5 (D-15-23)7bcc-S1 Unknown Tgp 9-12-72 10.5 (D-16-17)3c-S1 Camel Rock Spring Tw 9-25-48 - (D-16-18)24bcd-S1 Camel Rock Spring Tw 9-25-48 - (D-17-16)10cac-S11 Waldo Wilcox KTnh 4-11-72 - (D-17-19)28ba-S1 Unknown KTnh 4-11-72 - (D-17-19)28ba-S1 Unknown KTnh 9-25-48 - (D-18-19)25cbb-S1 Unknown Tgp 8-31-71 - (D-18-19)25cbb-S1 Unknown Tgp 8-31-71 5.0 U(C-4-3)53ldcd-1 D. T. Jones Tu 3-30-72 10.0 U(C-4-3)5bb-2 Lamar Netlson Qay 5-22-72	28	84	61	93	1.3	438	0	300
(D-15-19)4bha-S1 Secret Spring Tgp 9-2-71 -	19	63	86	92	1.9	506	0	240
D-15-23)36ddd-s1	21	130 81	72	74 130	1.2	319 370	0	500 390
(D-15-25)7bcc-51	16	5/	16	24	.4	242	0	57
D-16-16) 32dde-S1	1.7	65	36	1.7		302	0	94
(D-16-17)3c-S1 Camel Rock Spring Tw 9-25-48 -	16	74	48	36	. 5	275 .	0	200
(D-16-18)24bcd-S1 Pinto Springs Tgp 8-31-71 - Occa-S1 (D-17-16)10cac-S1 Waldo Wilcox KTnh 4-11-72 - Occa-S1 (D-17-17)20cc-S1 Unknown KTnh 9-25-48 - Occa-S1 (D-17-17)20cc-S1 Unknown Tgp 8-31-71 6.0 (D-18-20)7bd-S1 Unknown Tgp 8-31-71 5.0 (D-18-20)7bd-S1 Unknown Tgp 8-31-71 5.0 (D-18-20)7bd-S1 Unknown Tgp 8-31-71 5.0 (D-18-20)7bd-S1 Unknown U(C-3-5)31dd-1 D. T. Jones Tu 3-30-72 10.0 U(C-3-5)31dd-1 D. T. Jones Tu 3-30-72 10.0 U(C-3-5)31dd-1 D. T. Jones Tu 3-30-72 11.5 (D-18-20)7bd-S1 Lamar Neilson Qay 5-22-72 11.5 (D-18-20)7bd-S1 U(C-4-3)9bd-1 Latter-day Saints Tu 5-7-72 14.0 (D-18-20)7bd-S1 Willis Shepard Qay 5-3-72 - Church U(C-4-6)17cdc-S1 Willis Shepard Qay 5-3-72 - U(C-4-6)17cdc-S1 M. N. McKinnon Tu 9-3-71 11.0 (D-18-20)7bd-S1 do Tu 5-15-60 13.5 (U(C-4-7))4acc-S1 do Tu 5-15-60 13.5 (U(C-4-7))4acc-S1 do Tu 5-15-60 14.5 (D-18-20)7bd-S1 do Tu 5-15-60 14.5 (D-18-20)7bd-S1 do Tu 4-10-72 8.0 (D-18-20)7bd-S1 do Tu 4-10-72 8.0 (D-18-20)7bd-S1 do Tu 4-10-72 5.0 (U(C-5-5))4bd-S2 do Tu 5-15-60 10.5 (U(C-5-5))4bd-S2 do Tu 5-15-60 10.5 (U(C-5-5))4bd-S2 do Tu 5-15-60 10.5 (U(C-5-7))12cda-S1 Unknown Tu 5-15-60 10.5 (U(C-5-7))12cda-S1 do Tu 5-15-60 10.5 (U(C-5-7))12cd	23	58	52	66	1.0	449	0	120
(D-17-16) Deac-s Waldo Wilcox KThh 4-11-72 - 10ca-s	26	70	41	73		321	0	220
10cca-\$1	22	58	17	10	.6	248	0	33
(D-17-19)28bab-S1 Seeley Spring Tgp 8-31-71 6.0 (D-18-19)25cbb-S1 Unknown Tgp 8-31-71 5.0 (D-18-20)7bad-S1 Marble Spring Tgp 8-31-71 5.0 U(C-3-5)3ldcd-1 D. T. Jones Tu 3-30-72 10.0 U(C-4-2)5bba-2 Lamar Neilson Qay 5-22-72 11.5 13daa-2 Alden Kynaston Tu 5-7-72 14.0 U(C-4-3)9bbd-1 Latter-day Saints Tu 5-7-72 - Church Willis Shepard Qay 5-3-72 - 10cbb-1 Willis Shepard Qay 5-3-72 - U(C-4-6)17cdc-S1 M. N. McKinnon Tu 9-3-71 11.0 U(C-4-6)17cdc-S1 M. N. McKinnon Tu 5-18-41 - 14bcd-S1 do Tu 5-18-41 - 14bd-S1 do Tu 4-10-72 8.0 22ccb-S1 do Tu 4-10-72 8.0 U(C-5-9)34bd-S1<	23	58	54	100	1.2	483	0	190
(D-18-19)25cbb-S1 Unknown Tgp 8-31-71 5.0 (D-18-20)7bad-S1 Marble Spring Tgp 8-31-71 5.0 U(C-3-5)31dcd-1 D. T. Jones Tu 3-30-72 10.0 U(C-4-2)5bb-2 Lamar Neilson Qay 5-22-72 11.5 13daa-2 Alden Kynaston Tu 5-7-72 14.0 U(C-4-3)9bbd-1 Latter-day Saints Church Tu 5-7-72 - 10cbb-1 Willis Shepard Qay 5-3-72 - U(C-4-6)17cdc-S1 M. N. McKinnon Tu 9-3-71 11.0 U(C-4-6)17cdc-S1 M. N. McKinnon Tu 5-15-60 13.5 U(C-4-7)14acc-S1 Stinking Spring Tu 5-18-41 - 14bd-S1 do Tu 5-18-41 - 14bd-S1 do Tu 5-18-41 - 14bd-S1 do Tu 4-10-72 8.0 2cceb-S1 do Tu 4-10-72 5.0 U(C-5-9)35add-S1	18	10	5.7	250		492	0	176
(O-18-20) 7bad-S1 Marble Spring Tap 8-31-71 5.0 U(C-3-5) 31ded-1 D. T. Jones Tu 3-30-72 10.0 U(C-4-2) Sbba-2 Lamar Netitson Qay 5-22-72 11.5 13daa-2 Alden Kynaston Tu 5-7-72 14.0 U(C-4-3) 9bbd-1 Latter-day Saints Church 10cbb-1 Willis Shepard Qay 5-3-72 - 12cab-1 Wallace Pitt - 5-7-72 - 12cab-1 U(C-4-6) 17cdc-S1 M. N. McKinnon Tu 9-3-71 11.0 5-15-60 13.5 U(C-4-7) 14acc-S1 Stinking Spring Tu 5-18-41 - 14bcd-S1 do Tu 5-15-60 14.5 14bd-S1 do Tu 5-15-60 14.5 14bd-S1 do Tu 4-10-72 8.0 U(C-5-5) 34bdd-7 W. C. Fey - 4-13-72 8.5 U(C-5-5) 34bdd-7 W. C. Fey - 4-13-72 8.5 U(C-5-7) 12cda-S1 do Tu 5-15-60 10.5 1caa-S2 do Tu 5-15-60 10.5 1caa-S2 do Tu 5-15-60 10.0 U(C-5-7) 12cda-S1 do Tu 5-15-60 10.5 1caa-S2 do Tu 5-15-60 10.5 1caa-S2 do Tu 5-15-60 10.0 U(C-5-7) 12cda-S1 do Tu 5-15-60 10.0 10.0 10.0 U(C-5-7) 12cda-S1 do Tu 5-15-60 10.0 10.0 10.0 10.0 10.0 10.0 10.0 10	15	57	. 16	6.4	. 4	267	0	13
U(C-3-5)31dcd-1 D. T. Jones Tu 3-30-72 10.0 U(C-4-2)5bba-2 Lamar Nellson Qay 5-22-72 11.0 U(C-4-3)9bbd-1 Latter-day Saints Tu 5-7-72 14.0 U(C-4-3)9bbd-1 Latter-day Saints Tu 5-7-72 - Church 10cbb-1 Willis Shepard Qay 5-3-72 - 12cab-1 Wallace Pitt - 5-7-72 - U(C-4-6)17cdc-S1 M. N. McKinnon Tu 9-3-71 11.0 U(C-4-6)17cdc-S1 M. N. McKinnon Tu 5-15-60 13.5 U(C-4-7)14acc-S1 Stinking Spring Tu 5-18-41 - 14bcd-S1 do Tu 5-15-60 14.5 21daa-S1 Unknown Tu 4-10-72 8.0 22ccb-S1 do Tu 4-10-72 5.0 U(C-4-9)35add-S1 do Tu 4-10-72 5.0 U(C-5-5)34bdd-2 W. C. Poy - 4-13-72 8.5	11	60	24	2.7	. 7	297	0	29
U(C-4-2) Sbba-2 Lamar Neilson Qay 5-22-72 11.5 13daa-2 Alden Kynaston Tu 5-7-72 14.0 U(C-4-3) 9bbd-1 Latter-day Saints Church 10cbb-1 Willis Shepard Qay 5-3-72 - 12cab-1 Wallace Pitt - 5-7-72 - 10.0 U(C-4-6) 17cdc-S1 M. N. McKinnon Tu 9-3-71 11.0 5-15-60 13.5 U(C-4-7) 14acc-S1 Stinking Spring Tu 5-18-41 - 14bcd-S1 do Tu 5-18-41 - 14bcd-S1 do Tu 5-15-60 14.5 21daa-S1 Unknown Tu 4-10-72 8.0 U(C-5-5) 34bdd-7 W. C. Fey - 4-13-72 8.5 U(C-5-5) 34bdd-7 W. C. Fey - 4-13-72 8.5 U(C-5-5) 12caa-S1 Unknown Tu 5-15-60 10.5 1caa-S2 do Tu 5-15-60 10.5 1caa-S2 do Tu 5-15-60 10.0 10.0 18acd-S1 do Tu 5-15-60 10.0 10.0 10.0 10.0 10.0 10.0 10.0 10	8.3		10	3.3	. 3	193	0	16
13daa-2 Alden Kynaston Tu 5-7-72 14.0	18	4.6	6.4	450	1.4	496	52	310
U(C-4-3)9bbd-1 Latter-day Saints Tu 5-7-72 - Church 10cbb-1 Willis Shepard Qay 5-3-72 - 12cab-1 Wallace Pitt - 5-7-72 - U(C-4-6)17cdc-S1 M. N. McKinnon Tu 9-3-71 11.0 5-15-60 13.5 U(C-4-7)14acc-S1 Stinking Spring Tu 5-18-41 - 14bcd-S1 do Tu 5-15-60 14.5 21daa-S1 Unknown Tu 4-10-72 8.0 21daa-S1 Unknown Tu 4-10-72 5.0 U(C-4-9)35add-S1 do Tu 4-10-72 8.5 U(C-5-5)34bdd-2 W. C. Foy - 4-13-72 8.5 U(C-5-7)12cda-S1 do Tu 5-15-60 10.5 1caa-S2 do Tu 5-15-60 10.5 1caa-S2 do Tu 5-15-60 10.0	23	400	230	620	3.9	414	0	2,900
Church 10cbb-1 Willis Shepard Qay 5-3-72 - 12cab-1 Willis Shepard Tu 5-7-72 - 10(C-4-6)17cdc-S1 M. N. McKinnon Tu 9-3-71 11.0 U(C-4-6)17cdc-S1 Stinking Spring Tu 5-18-41 - 14bcd-S1 do Tu 5-18-41 - 14bcd-S1 do Tu 5-18-41 - 14bcd-S1 do Tu 5-18-60 14.5 21daa-S1 Unknown Tu 4-10-72 8.0 22ccb-S1 do Tu 4-10-72 5.0 U(C-4-9)35add-S1 do Tu 4-10-72 5.0 U(C-5-5)34bdd-2 W. C. Puy - 4-13-72 8.5 U(C-5-6)1caa-S1 Unknown Tu 5-15-60 10.5 1caa-S2 do Tu 5-15-60 10.5 1caa-S2 do Tu 5-15-60 10.5 1caa-S1 do Tu 5-15-60 10.0	23	95	34	110	3.7	411	0	280
12cab-1	8.6	18	6.2	380	2.4	281	0	530
U(C-4-6) 17cdc-S1 M. N. McKinnon Tu 9-3-71 11.0 5-15-60 13.5 U(C-4-7) 14acc-S1 Stinking Spring Tu 5-18-41 - 14bcd-S1 do Tu 5-15-60 14.5 21dae-S1 Unknown Tu 4-10-72 8.0 22ccb-S1 do Tu 4-10-72 5.0 U(C-4-9) 35add-S1 do Tu 4-10-72 8.5 U(C-5-5) 34bdd-? W. C. Fey - 4-13-72 8.5 U(C-5-6) 1cas-S1 Unknown Tu 5-15-60 10.5 1cas-S2 do Tu 5-15-60 10.5 1cas-S2 do Tu 5-15-60 10.0 18acd-S1 do Tu 5-15-60 10.0	17	150	87	460	2.6	278	0	1,400
U(C-4-7)14acc-S1 Stinking Spring Tu 5-18-41 - 14bcd-S1 do Tu 5-18-41 - 14bd-S1 do Tu 5-15-60 14.5 21das-S1 Unknown Tu 4-10-72 8.0 22ccb-S1 do Tu 4-10-72 5.0 U(C-4-9)35add-S1 do Tu 4-10-72 5.0 U(C-5-5)34bdd-2 W. C. Fuy - 4-13-72 8.5 U(C-5-6)1cas-S1 Unknown Tu 5-15-60 10.5 1cas-S2 do Tu 5-15-60 9.5 U(C-5-7)12cda-S1 do Tu 5-15-60 10.0 18acd-S1 do Tu 5-15-60 10.0	18	66	36	87	1.8	384	0	160
14bcd-S1 do Tu 5-18-41 - 14bcd-S1 do Tu 5-18-61 14.5 21daa-S1 Uknown Tu 4-10-72 8.0 22ccb-S1 do Tu 4-10-72 5.0 U(C-4-9)35add-S1 do Tu 4-10-72 5.0 U(C-5-5)34bdd-2 W. C. Poy - 4-13-72 8.5 U(C-5-6)1caa-S1 Unknown Tu 5-15-60 10.5 Laca-S2 do Tu 5-15-60 10.5 U(C-5-7)12cda-S1 do Tu 5-15-60 10.0	15 11	25 23	140 126	790 865	7.3	761 1,290	0 106	1,200
14bcd-S1 do	10	1.0	6.1	1,760	2.3		1,060	110
14bdd-S1 do	12	5.6	5.5	3,220	7.0		2,580	188
21dsa-S1	34	0	0	3,110			2,800	11
U(C-4-9)35add-S1 do Tu 4-10-72 5.0 U(C-5-5)34bdd-2 W. C. Poy - 4-13-72 8.5 U(C-5-6) Icaa-S1 Unknown Tu 5-15-60 10.5 Icaa-S2 do Tu 5-15-60 9.5 U(C-5-7)12cda-S1 do Tu 5-15-60 10.0	23	32	120	420	4.9	803	1.7	670
U(C-5-5) 34hdd-2 W. C. Poy - 4-13-72 8.5 U(C-5-6) 1 Caa-S1 Unknown Tu 5-15-60 10.5 1 Caa-S2 do Tu 5-15-60 9.5 U(C-5-7) 12cda-S1 do Tu 5-15-60 10.0	28	140	160	170	4.0	424	0	940
U(C-5-6) lcas-S1 Unknown Tu 5-15-60 10.5 lcas-S2 do Tu 5-15-60 9.5 U(C-5-7) 12cds-S1 do Tu 5-15-60 10.0	23	86	59	23	2.0	370	0	190
leaa-S2 do Tu 5-15-60 9.5 U(C-5-7)12cda-S1 do Tu 5-15-60 10.0 18acd-S1 do Tu 4-10-72 4.0	30	140	100	100	4.4	474	0	570
U(C-5-7)12cda-s1 do Tu 5-15-60 10.0 18acd-s1 do Tu 4-10-72 4.0	22 23	61	125	420		988	0	682
	6.3	63 37	118 1 31	437 779		1,020	0 144	670 887
UC-1-HBRUGCh-SI Rig Resper Spring To 9.11 72 7 5	45	160	180	21	5,6	467	0	/80
	13	7.7	33	3.4	. 8	348	0	52
U(C-7-8) lacd-S1 Ross Station Spring Tgp 8-9-71 9.0 U(C-7-9) 9dcd-S1 Horse Ridge Spring(?) Tgp 7-18-60 12.5	47 12	57 42	45 17	62 3,8	3.6	475 211	0	33 7.8

from selected springs and water wells

r litre											Specific	Sodium-	
Chloride (Cl)	Flueride (F)	Nitrate (NO ₃) + Nitrite (NO ₂) as N	Nitrate (NO ₃)	Phosphate (PO ₄)	Boron (B)	(Fe)	Mangarese (Mn)	Dissolved solids (calculated)	Hardness as CaCO ₃	Noncarhonate hardness as CaCO ₃	conductance (micromhos/ cm at 25°C)	adsorption ratio	ρł
91	0.2	0.46	-	0.12	0.71	-	-	1,600	120	0	2,350	21	8.3
210 290	2.1	. 65	0,3	.21	4.90	0.04	00,0	3,190 2,070	260 30	0	4,170 3,340	26 68	7.9 9.0
4° 15	3.8	. n°t -	-	. 04 -	11.0	. 20	.00	2,440 1,100	200 600	0 3	3,410 1,620	25 3.0	8.1 7.4
- 56	4.0	3.60	-	.25	- 15.0	.02	.00	3,580 3,480	450 490	0	4,580	21 20	7.8
9.3	. 9	.07	1.	,06	.29	.03	.02	959	5	0	1,490	7.5	8.7
21	_	-		•		-	-	1,170	10	0	1,800	60	8.2
			1.4	-	-	-	-	1,110	10	0	1,720	58	8.2
6.3 6.0	, 2 -	. 11	-	.06	.15	.02	.00	613 3 56	6 310	0	968 550	39 .6	8.5 7.9
8.0	-	-	-	-	-	-	-	327	266	-	499	.8	8.3
140 33	. 1	.01	-	.06	.06	.00	.02	2,720 1,460	1,200	750 570	3,850	5.1	7.
14	-		_	-				•		370	1,980	2.1	7.
18	. 2	.13	-	.06	.16	.04	.00	445 802	337 460	100	688 1,160	.9 1.9	8.4
29	1.4	.42	-	.03	.13	.03	.01	783	510	96	1,220	1.8	7.
13	. 3	1.60	-	.0.:	.07	.02	.00	976	620	360	1,340	1.3	7.4
-	-	-	-	-	-	-	-	-	~	-	1,270	-	7.8
7.9 2.8	. 1	.68	- ,	.09	.07	.01	.00	301	210	10	478	. 7	7.6
14	-		. 5	-	-		-	381 524	312	64	606	. 4	7.
7.9	. 3	. 24	-	.09	.06	.00	.00	550	380 360	160 0	851 876	.8 1.5	7.5
7	-	-	. 1	-	-	-	-	596	340	80	842	1.7	-
2.1 11	.1	1.2	-	.28	.02	.08 .00	.02	270 676	210 370	11	443 1,050	.3	7.4
5 1.4	.0	.36	. 1	- .21	.00	,01	.01	707 242	48 210	0 0	1,060	16	7.7
1.6	.0	.18	-	.03	.01	.00	.04	276	250	5	459		
1.9	.0	2.30	-	.03	.01	.02	.00	194	160	5	326	. 1	7.7
140 84	1,2	.03 .06	-	.12	2.70 9.0	.02 L.6	.00	1,230	38	0	1,950	32	8.9
21	-	-	-	-	-	-	. 53	4,480 769	1,900 380	1,600 40	4,700 1,200	6.1 2.5	7.0
82	1.4	. 17	-	.00	.82	.02	-	1,170	70	0	1,820	20	8.2
94 14	1.0	3.40	-	.00	. 97	.05	.01	2,360	730	500	3,110	7.4	7.7
140	. 6	7.10	-	2,60	8.20	.01	.00	5/2	310	0	926	2.1	7.7
128	-	-	2.2	*	7.7	-	-	2,730 2,910	640 576	15 0	4,300 3,980	14 16	8.1
594	-	-	. 6	-	12.8	-	-	4,270	28	0	6,790	146	9.3
704 668	-	-	1.2	-	22.6	-	-	7,702	37	0	11,380	232	9.6
92	-	-		-	20.0	-	-	7,320 1,770	0 570	0	10,700		0.1
52	-	-	-	-	-	-	-	1,700	1,000	0 660	2,500 2,230		8.5 7.9
10 26	- 1.9	- 04	-	-,	-		-	575	460	150	884	. 5	7.5
41	1.9	.04	. 9	. 12	2.7 6.3	. 10	.09	1,210 1,840	760 666	370	1,680	1.6	7.3
41	-	-	1.2	-	6.5	-	_	1,860	642	0	2,520 2,590		8.0
124	**	-	4.1	-	f.6	-	-	2,710	632	ō	3,690		8.8
18 1.6	2.9	.08 .12	-	.00	.23	.03	.00	1,440	1,100	760	1,820	. 3	8.1
35	.8	1.70	-	.03	.02 .51	.01 .01	.00	353 525	330 330	43	604	. 1	7.4
2.8	-	-	. 4	-	- / 1	01	.00	190	177	0	800	1.5	7,9

Table 15.--Chemical analyses of wate

Geologic source: Tago, Green River Formation, undivided; Tw. Wasatch Formation; Kmv. Mesaverde Group; Km. Mancos Shale; Jm. Morrison Formation; Je. Entrada

Sandstone; Jo. Navajo Sandstone; M. Mississippian rocks, undivided.

Unterval sampled: Depth below land sourtace.

Source of sample: GP, circulation pit; DST, drill-stem test; F, natural flow; PW, water produced with oil or gas; RL, return line; ST, swab test; Tr,

treater; WT, wash tank; numbers in parentheses are reported or estimated water yields, in gallons per minute, at time sample was collected.

Date of collection; P, concentrations are in parts per million (conversion to milligrams per liter not possible because data for density were not available).

Sodium: Where no value is reported for potassium, Na + K has been calculated and is reported as sodium.

Specific conductance: Determined in analyses by U.S. Geological Survey of the determined specific resistivity.

Source of analysis: CP, Chemical and Geological Laboratories: GS, U.S. Geological Survey; OL, operator or lessee; RME, Rocky Mountain Engineering Go.;

UC, Ptah State Chemist.

)]	 		T	milligr	ams per litr
Location	Operator or lessee	Ceologic source	Interval sampled (ft)	Source of sample	Date of collection	Silica (SiO ₂)	Calcium (Ca)	Magnesium (Mg)	Sodium (Na)	Potassion (K)
(D-9-16) Sddb-1	Diamend Showrock Corp.	Tgo	4,602-5,747	V T	3-20-68	-	-	-	-	-
15cbb-1 (0-9-20) 22ccb-1	do Continental Oil Co.	T go Ju	4,440 - 5,180 17,350 - 17,851	DST	3 · 20 - 68 6 - 20 - 72	-	910	120	13,000	-
		м	19,350-20,053	DST	6-19-72	-	7,300	1,300	33,000	4,300
27nac - 1	De Kalb Agricultural	Tgu	2,726- 2,780	F	4-2-64	-	-	=	-	-
36dde - I	Association Western Oil Shale Corp.	Tren	3,970- 4,005 1,900- 2,822	DST	7-31-69	9.2	2.8	. 8	28,500	102
	•	Tgo	1,900-2,959	DST	7-29-69	9.2	4.1	1.2	28,000	104
		Tgo Tgo	1,900- 3,234 1,900- 3,234	DST DST	7-30-69 7-31-69	8.6 12	4,1 2,0	1.2	14,600 16,600	53 62
		1 80		1/51	7-31-09	12	2.0	1.2	10,000	02
(D-10-16) Hacd-1 16dac-1	Mountain Fuel Supply Co.	Tgu	4,289- 4,321	DST	10 - 1 - 64	-	139	67	11,561	118
(D-10-17) 30bbd-1	Miami Oil Producers Inc.	Tgu Tgo	3,616- 3,646 3,777- 3,789	DST	463 8-10-67	-	395 783	78 33	2,029 4,023	105 33
(, , , , , , , , , , , , , , , , , , ,	THE STATE OF THE S	Tgu	4,071- 4,116	DST	8-10-67	-	864	295	19,675	80
(D-10-18)13cdb-1	Mountain Fuel Supply Co.	Tgo	4,045- 4,080	DST	P11-14-61	-	2,057	269	23,639	
14nbd-1	do	Tgo Tgo	2,162-2,282 3,681-3,746	DST	3-26-61 P 4- 1-61	-	10 592	3.0 308	2,613 28,667	
		Tgo	3,877- 3,915	DST	P 4- 2-61	-	987	274	26,780	
		Tgo	4,231- 4,310	DST	P 4- 4-61	-	1,918	359	21,560	
(D-10-19)1cbd-1	do	Tgu	2,850- 2,875	F	10-15-63	-	11	10	3,449	28
(D-10-20)4ceb-1 7cdb-1	do do	Tgu	2,900-3,000	F(120)	763	~	6.0	2.0	1,977	5.0
7000-1	do	Tgu Tgu	2,070- 2,096 3,102- 3,142	DST	P10-16-60 10-21-60	-	11 11	8.0 1.0	39,367 812	
8cab-1	do	Tgu	3,310-3,337	DST	7-10-62	-	6.0	-	928	
(D-10-21)16add-t	Tenneco Dil Corp.	Tgu	3,488- 3,514	DST	7-12-62	-	272	92	10,506	
(D-10-21) Toada-1	remeco ori corp.	Tgu	1,900- 3,520	F(125)	4- 2-64	13	.0	2.4	785	
(D-10-23) 24bba-1	Consolidated Oil and Gas Co.	Tgu	At 3,066	R L	10-15-61	-	2.0	1.0	572	
(D-10-24) 28dcd-1 32ca-1	El Paso Natural Gas Co. Shell Oil Co.	Km∨ Tw	5,295~ 5,305 4,390- 4,497	ST DST	6-11-59 P 1-21-62	-	1,929	82	5,210	
,	Silver Car Co.,	Kmv	5,230 - 5,303	DST	P 1-28-62	-	21 304	11 63	3,068 10,580	
		Kmv	6,187- 6,494	PW(1)	P 4-30-62	-	648	238	7,917	
(D-11-12)14baa-1	McCarthy Oil Co.	Kmv	6,570- 6,947 635- 650	ST	P 3-22-62	-	1,040	298	6,323	
(D-11-15)2ccc-1	Miami Oil Producers Inc.	T'gu T'gu-Tw	4,148- 4,163	F (0, 5) DST	7-22-65 10- 3-67	9.8	6.4 559	4.4 426	221 11,704	30
(D-11-16)3bbc-1	d ₁₂	Tgu	4,119- 4,170	DST	9-11-67	-				
	•	Tgu	4,197- 4,218	DST	9-11-67	-	2 7 1 0	10	2,419 1,200	16 6.0
(D-11-24)8caa-1	Diamond Shamrock Corp.	Tgu	At 1,275	F(70)	9- 6-61	13	3.6	1.5	437	1.6
(D-11-25) 22cda-1 (D-12-14) 13ach-1	Continental Oil Co. Carter Oil Co.	Km Km v	At 6,225 8,505- 8,617	RL DST	8- 1-61	-	49	78	1,500	62
·	dever our do.	Kmv	8,604- 8,789	DST	P 6-27-52 P 7- 9-52	-	350 139	64 26	8,198 4,596	
(D-13-23)26acd-1	Skyline Oil Co.	Tgu	At 2,000	-	6-15-60	40.5	10.4	7.1	261	
(D-14-20) 7adb-1	Phillips Petroleum Co.	Kmv	7,080 - 7,180	DST	9-17-62	_	8.0	2.0	1,672	
30ac	Hiko Bell Mining and Oil Co.	Tω	3,790 - 3,820	F(<1)	7-13-65	23	625	93	12,114	
30bab (n-15-21)22dec-1	do Atlantic Relining Co.	Tgu Tw	1,883 - 1,910 3,134 - 3,142	ST Dest	7-22-63	-	10	7.0	274	13
(,, ,, =,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	Action to Reliting to.	Tω	3,466- 3,480	DST DST	9-26-63 9-28-63	-	20 80	36 36	664 3,766	
(D-15-22)36dac-1		Kmv	5,518- 5,541	DST	10-12-63	-	600	109	11,643	
(D+15-22) 36dac-1	Texaco Inc.	Je	9,232- 9,349	ST(3)	P 460	-	5,115	534	28,237	
(D-15½-23) 33dca-1	do	Jm-Je	8,630- 8,714	-	P 961	-	5,789	454	34,077	
!(C-4-1)13dad-1	Gulf Oil Co.	Tgu	4,020- 4,080	DST	4-10-69	-	17	-	23,836	151
J(C-4-4) 13dda-1	Carter Oil Co.	Tgu Tgu	5,140- 5,306 3,281- 3,569	DST	4-10-69 2-23-52	-	22	20	17,264 1,117	174
		Tgu	5,871- 5,935	DST	P 4-11-52	-	16	7.0	4,287	
16aca-1 17aca-1	Friar Oil Co. do	T gu T gu	2,770- 3,350 2,438- 3,582	Tr WT	P 3+ -62 P 6- 7-62	-	8.0	3.0	72,820	
17bcd-1						-			15,908	
1/bed-1 1(C-4-5)8bdd-1	do Gulf Oil Co.	T gu Tw	2,410- 3,408 7,366- 8,122	RI. PW	11-30-64 1-12-67	22	, 0 56	8 / 1 7	49,139	2.7
101.11.1					5 - 7 - 70		75	9	2,750 2,594	27 32
10bdd - 1 14dca - 1	Brinkerhoff Orilling Co. Friar Oil Co.	Tgu Tu	6,335- 6,483 At 915	08T CP(30)	1 - 4 - 72	-	20	16	3,015	24
(C-6-6)35bdd-1	Humble Oil and Refining Co.	Tgu	3,190-3,260	DST	P 4-19-62 1161	-	10 32	Trace	9,868 3,979	

					Dissolv	ed solids]	Sodium-	Specific conductance	1	Source
Bicarbonate (HCO3)	Carbonate (CO ₃)	Sulfate (\$04)	Chloride (Cl)	Nitrate (NO ₃)	Determined	Sum of constituents	Hardness as CaCO ₃	Noncarbonate hardness	adsorption ratio	(micromhos/ cm at 25°C)	pH	of analys
-	*	-	49,128	-	-	-	-	-	-	131,000 21,600	-	GS
		3,300	6,941 14,000	-	-	-	280	-	108	21,600	6.8	GS GS
-	-	630	76,000	-	-	-	24,000	-	94	-	6.6	GS
-	-	-	4,000	-	-	-	-	-	-	55,900	-	GS
5,910	1,230	464	37,500	0.1	72,700	-	12	0	-	85,000	8.9	GS
5,/10	832	917	37,100	. 1	72,200	-	16	0	-	82,000	8.8	GS
3,830 5,940	856 319	35 400	18,600 21,500	. 1 . 1	37,000 41,800	-	16 11	0	-	48,000 54,000	8,9	GS GS
561	_	216	17,900		· -	30,278	8,000	_		-	8,2	CGL
488	-	5,100	120	_	-	8,068	-	-	-	-	7.8	CGL
305	_	2,900	5,400	-	-	13,322	-	-	-	-	7.2	CGL
1,110	0	7,000	27,000	-	-	55,461	-	-	-	-	7.6	CGL
425	-	3,580	38,000	-	67,720	67,754	-	-	-	- '	7.9	CG1,
1,342	600	26	2,549	~	6,840	6,462	-	-	-	-	8.6	CGL
427	36	11,827	37,152	-	-	78,792	-	-	-	-	8.4	CGL.
878 647	-	2,798 3,728	41,280 34,572	-	-	72,551 62,456	-	-	-	98,200 83,300	8.1 8.1	CGL
2,452	72	1,600	2,700	_	-	9,078	-	_		12,940		
2,721	180	130	1,190	_	-	4,832			-	7,430	8.4	CGL CGL
9,150	8,520	525	45,000	_	98,250	97,937	_		-	108,840	9.7	CGL
1,379	216	107	140	-	2,032	1,966	-	-	-	4,000	8.7	CGL
1,440	228	54	296	-	2,486	2,221	-	-	-	3,330	8,8	CGL
1,720	-	3,870	13,100	-	30,480	28,489	~	-	-	40,290	8.0	CGL
1,480	128	14	195	. 7	-	1,870	10	0	99	3,080	8.8	GS
1,074	48	145 481	99 11,284	-	1,367 20,561	1,941 19,595	8	-	88	-	8.9	OL.
1,220	72	620	3,550	-	7,950	8,562	96	-	-	-	4.8 8.7	RME
1,244	0	770	15,762	-	29,410	28,723	1,020	-		-	7.8	OL OL
903	0	308	13,312	-	25,266	23,326	2,600	_	-	_	6.6	OL.
464	0	470	11,857	•	23,996	20,452	3,825	-	-	-	6.2	OL
392	0	179	5.1	. 1	603	619	34	0	16	942	7.8	GS
2,769	-	10,576	10,900	-	-	35,559	-	-	-	-	7.9	CGL
2,440	300	2,262	380	-	-	6,616		-	-	-	8.7	CGL
2,428	300 12	, 10	100		-	2,822	-	-	-	-	8.9	CGL
375	- 12	422 2,900	4.0	. 6	-	1,200	15	0	49	1,820	8.5	GS
1,015	-	2,523	186 11,000	-		5,800 26,630	-	-	-		7.6	OL.
915	60	1,638	5,600	_	-	12,511	•	-	-	-	6.9	CGL
311	•	423	17	-	-	1,086	-	-	-	-	7,6	CGL UC
964	264	2,150	140	-	4,714	4,711	_	-	-	_	9.3	CGI,
539	0	1,517	18,625	25	33,899	-	1,944	1,496	119	48,900	7.3	GS
366 149	12	290	32	-	-	818		-	-	-	8.7	CGL
156	12 14	3.0 7,579	1,065	-	-	1,966	-	-	-	-	8.4	OT,
107	0	5,813	355 14,981	-	-	11,986	-	-	-	-	8.6	OL.
190	-	72	54,000	-	91,800	88,052	÷	-	-	-	7.3 7.3	OL CGL
207		16	64,000	-	106,800	104,438	_	-	_	-	6.3	CGL
4,355	276	102	34,000	-	-	60,527	-	-	-		8.3	CGL
2,086	204	584	25,000	-		44,295	-	-	-	-	8.4	CGL
1,550 1,730	271 251	164 79	380	-	2,758	2,695	-	-	-	-	9.0	OL.
1,730	13,800	79 347	5,300	-	10,618	10,792	-	-	-	-	8.5	OL.
4,758	7,680	228	66,000 12,600	-	188,830 39,220	178,213 38,796	-	-	- -	-	9.7	CGL CGL
3,326	23,217	744	34,553	22	142,790	119,246	360	0				
1,000		1,990	2,390	4.4	-	7,770	209	0	53	11,200	9.6	GS
1,000	-	1,774	2,300	-	-	7,276	-	-	-	11,200	7.8 7.8	GGL GS
3,221	228	72	2,560	-	-	7,521	-	-	-	-	8.7	CGL
5 120	9,015	. 77	3,400	-	22,961	22,915	-	-	-	-	10.2	CGL
5,120	675	58	2,400	-	9,632	9,674	-	-	-	-	8.8	CGL

PUBLICATIONS OF THE UTAH DEPARTMENT OF NATURAL RESOURCES, DIVISION OF WATER RIGHTS

(*)-Out of Print

TECHNICAL PUBLICATIONS

- No. 1. Underground leakage from artesian wells in the Flowell area, near Fillmore, Utah, by Penn Livingston and G. B. Maxey, U.S. Geological Survey, 1944.
- No. 2. The Ogden Valley artesian reservoir, Weber County, Utah, by H. E. Thomas, U.S. Geological Survey, 1945.
- *No. 3. Ground water in Pavant Valley, Millard County, Utah, by P. E. Dennis, G. B. Maxey and H. E. Thomas, U.S. Geological Survey, 1946.
- *No. 4. Ground water in Tooele Valley, Tooele County, Utah, by H. E. Thomas, U.S. Geological Survey, in Utah State Eng. 25th Bienn. Rept., p. 91-238, pls. 1-6, 1946.
- *No. 5. Ground water in the East Shore area, Utah: Part I, Bountiful District, Davis County, Utah, by H. E. Thomas and W. B. Nelson, U.S. Geological Survey, in Utah State Eng. 26th Bienn. Rept., p. 53-206, pls. 1-2, 1948.
- *No. 6. Ground water in the Escalante Valley, Beaver, Iron, and Washington Counties, Utah, by P. F. Fix, W. B. Nelson, B. E. Lofgren, and R. G. Butler, U.S. Geological Survey, in Utah State Eng. 27th Bienn. Rept., p. 107-210, pls. 1-10, 1950.
- No. 7. Status of development of selected ground-water basins in Utah, by H. E. Thomas, W. B. Nelson, B. E. Lofgren, and R. G. Butler, U.S. Geological Survey, 1952.
- *No. 8. Consumptive use of water and irrigation requirements of crops in Utah, by C. O. Roskelly and Wayne D. Criddle, 1952.
- No. 8. (Revised) Consumptive use and water requirements for Utah, by W. D. Criddle, K. Harris, and L. S. Willardson, 1962.
- No. 9. Progress report on selected ground water basins in Utah, by H. A. Waite, W. B. Nelson, and others, U.S. Geological Survey, 1954.
- *No. 10. A compilation of chemical quality data for ground and surface waters in Utah, by J. G. Connor, C. G. Mitchell, and others, U.S. Geological Survey, 1958.
- *No. 11. Ground water in northern Utah Valley, Utah: A progress report for the period 1948-63, by R. M. Cordova and Seymour Subitzky, U.S. Geological Survey, 1965.

- No. 12. Reevaluation of the ground-water resources of Tooele Valley, Utah, by Joseph S. Gates, U.S. Geological Survey, 1965.
- *No. 13. Ground-water resources of selected basins in southwestern Utah, by G. W. Sandberg, U.S. Geological Survey, 1966.
- *No. 14. Water-resources appraisal of the Snake Valley area, Utah and Nevada, by J. W. Hood and F. E. Rush, U.S. Geological Survey, 1966.
- *No. 15. Water from bedrock in the Colorado Plateau of Utah, by R. D. Feltis, U.S. Geological Survey, 1966.
- No. 16. Ground-water conditions in Cedar Valley, Utah County, Utah, by R. D. Feltis, U.S. Geological Survey, 1967.
- *No. 17. Ground-water resources of northern Juab Valley, Utah, by L. J. Bjorklund, U.S. Geological Survey, 1968.
- No. 18. Hydrologic reconnaissance of Skull Valley, Tooele County, Utah, by J. W. Hood and K. M. Waddell, U.S. Geological Survey, 1968.
- No. 19. An appraisal of the quality of surface water in the Sevier Lake basin, Utah, by D. C. Hahl and J. C. Mundorff, U.S. Geological Survey, 1968.
- No. 20. Extensions of streamflow records in Utah, by J. K. Reid, L. E. Carroon, and G. E. Pyper, U.S. Geological Survey, 1969.
- No. 21. Summary of maximum discharges in Utah streams, by G. L. Whitaker, U.S. Geological Survey, 1969.
- No. 22. Reconnaissance of the ground-water resources of the upper Fremont River valley, Wayne County, Utah, by L. J. Bjorklund, U.S. Geological Survey, 1969.
- No. 23. Hydrologic reconnaissance of Rush Valley, Tooele County, Utah, by J. W. Hood, Don Price, and K. M. Waddell, U.S. Geological Survey, 1969.
- No. 24. Hydrologic reconnaissance of Deep Creek valley, Tooele and Juab Counties, Utah, and Elko and White Pine Counties, Nevada, by J. W. Hood and K. M. Waddell, U.S. Geological Survey, 1969.
- No. 25. Hydrologic reconnaissance of Curlew Valley, Utah and Idaho, by E. L. Bolke and Don Price, U.S. Geological Survey, 1969.
- No. 26. Hydrologic reconnaissance of the Sink Valley area, Tooele and Box Elder Counties, Utah, by Don Price and E. L. Bolke, U.S. Geological Survey, 1969.
- No. 27. Water resources of the Heber-Kamas-Park City area, north-central Utah, by C. H. Baker, Jr., U.S. Geological Survey, 1970.

- No. 28. Ground-water conditions in southern Utah Valley and Goshen Valley, Utah, by R. M. Cordova, U.S. Geological Survey, 1970.
- No. 29. Hydrologic reconnaissance of Grouse Creek valley, Box Elder County, Utah, by J. W. Hood and Don Price, U.S. Geological Survey, 1970.
- No. 30. Hydrologic reconnaissance of the Park Valley area, Box Elder County, Utah, by J. W. Hood, U.S. Geological Survey, 1971.
- No. 31. Water resources of Salt Lake County, Utah, by Allen G. Hely, R. W. Mower, and C. Albert Harr, U.S. Geological Survey, 1971.
- No. 32. Geology and water resources of the Spanish Valley area, Grand and San Juan Counties, Utah, by C. T. Sumsion, U.S. Geological Survey, 1971.
- No. 33. Hydrologic reconnaissance of Hansel Valley and northern Rozel Flat, Box Elder County, Utah, by J. W. Hood, U.S. Geological Survey, 1971.
- No. 34. Summary of water resources of Salt Lake County, Utah, by Allen G. Hely, R. W. Mower, and C. Albert Harr, U.S. Geological Survey, 1971.
- No. 35. Ground-water conditions in the East Shore area, Box Elder, Davis, and Weber Counties, Utah, 1960-69, by E. L. Bolke and K. M. Waddell, U.S. Geological Survey, 1972.
- No. 36. Ground-water resources of Cache Valley, Utah and Idaho, by L. J. Bjorklund and L. J. McGreevy, U.S. Geological Survey, 1971.
- No. 37. Hydrologic reconnaissance of the Blue Creek Valley area, Box Elder County, Utah, by E. L. Bolke and Don Price, U.S. Geological Survey, 1972.
- No. 38. Hydrologic reconnaissance of the Promontory Mountains area, Box Elder County, Utah, by J. W. Hood, U.S. Geological Survey, 1972.
- No. 39. Reconnaissance of chemical quality of surface water and fluvial sediment in the Price River Basin, Utah, by J. C. Mundorff, U.S. Geological Survey, 1972.
- No. 40. Ground-water conditions in the central Virgin River basin, Utah, by R. M. Cordova, G. W. Sandberg, and Wilson McConkie, U.S. Geological Survey, 1972.
- No. 41. Hydrologic reconnaissance of Pilot Valley, Utah and Nevada, by Jerry C. Stephens and J. W. Hood, U.S. Geological Survey, 1973.
- No. 42. Hydrologic reconnaissance of the northern Great Salt Lake Desert and summary hydrologic reconnaissance of northwestern Utah, by Jerry C. Stephens, U.S. Geological Survey, 1973.

- No. 43. Water resources of the Milford area, Utah, with emphasis on ground water, by R. W. Mower and R. M. Cordova, U.S. Geological Survey, 1974.
- No. 44. Ground-water resources of the lower Bear River drainage basin, Box Elder County, Utah, by L. J. Bjorkland and L. J. McGreevy, U.S. Geological Survey, 1974.
- No. 45. Water resources of the Curlew Valley drainage basin, Utah and Idaho, by Claud H. Baker, Jr., U.S. Geological Survey, 1974.
- No. 46. Water-quality reconnaissance of surface inflow to Utah Lake, by J. C. Mundorff, U.S. Geological Survey, 1974.
- No. 47. Hydrologic reconnaissance of the Wah Wah Valley drainage basin, Millard and Beaver Counties, Utah, by Jerry C. Stephens, U.S. Geological Survey, 1974.
- No. 48. Estimating mean streamflow in the Duchesne River basin, Utah, by R. W. Cruff, U.S. Geological Survey, 1975.

WATER CIRCULARS

- No. 1. Ground water in the Jordan Valley, Salt Lake County, Utah, by Ted Arnow, U.S. Geological Survey, 1965.
- No. 2. Ground water in Tooele Valley, Utah, by J. S. Gates and O. A. Keller, U.S. Geological Survey, 1970.

BASIC-DATA REPORTS

- *No. 1. Records and water-level measurements of selected wells and chemical analyses of ground water, East Shore area, Davis, Weber, and Box Elder Counties, Utah, by R. E. Smith, U.S. Geological Survey, 1961.
- *No. 2. Records of selected wells and springs, selected drillers' logs of wells, and chemical analyses of ground and surface waters, northern Utah Valley, Utah County, Utah, by Seymour Subitzky, U.S. Geological Survey, 1962.
- *No. 3. Ground-water data, central Sevier Valley, parts of Sanpete, Sevier, and Piute Counties, Utah, by C. H. Carpenter and R. A. Young, U.S. Geological Survey, 1963.
- *No. 4. Selected hydrologic data, Jordan Valley, Salt Lake County, Utah, by I. W. Marine and Don Price, U.S. Geological Survey, 1963.
- *No. 5. Selected hydrologic data, Pavant Valley, Millard County, Utah, by R. W. Mower, U.S. Geological Survey, 1963.
- *No. 6. Ground-water data, parts of Washington, Iron, Beaver, and Millard Counties, Utah, by G. W. Sandberg, U.S. Geological Survey, 1963.

- No. 7. Selected hydrologic data, Tooele Valley, Tooele County, Utah, by J. S. Gates, U.S. Geological Survey, 1963.
- No. 8. Selected hydrologic data, upper Sevier River basin, Utah, by C. H. Carpenter, G. B. Robinson, Jr., and L. J. Bjorklund, U.S. Geological Survey, 1964.
- No. 9. Ground-water data, Sevier Desert, Utah, by R. W. Mower and R. D. Feltis, U.S. Geological Survey, 1964.
- *No. 10. Quality of surface water in the Sevier Lake basin, Utah, by D. C. Hahl and R. E. Cabell, U.S. Geological Survey, 1965.
- *No. 11. Hydrologic and climatologic data, collected through 1964, Salt Lake County, Utah, by W. V. Iorns, R. W. Mower, and C. A. Horr, U.S. Geological Survey, 1966.
- No. 12. Hydrologic and climatologic data, 1965, Salt Lake County, Utah, by W. V. Iorns, R. W. Mower, and C. A. Horr, U.S. Geological Survey, 1966.
- No. 13. Hydrologic and climatologic data, 1966, Salt Lake County, Utah, by A. G. Hely, R. W. Mower, and C. A. Horr, U.S. Geological Survey, 1967.
- No. 14. Selected hydrologic data, San Pitch River drainage basin, Utah, by G. B. Robinson, Jr., U.S. Geological Survey, 1968.
- No. 15. Hydrologic and climatologic data, 1967, Salt Lake County, Utah, by A. G. Hely, R. W. Mower, and C. A. Horr, U.S. Geological Survey, 1968.
- No. 16. Selected hydrologic data, southern Utah and Goshen Valleys, Utah, by R. M. Cordova, U.S. Geological Survey, 1969.
- No. 17. Hydrologic and climatologic data, 1968, Salt Lake County, Utah, by A. G. Hely, R. W. Mower, and C. A. Horr, U.S. Geological Survey, 1969.
- No. 18. Quality of surface water in the Bear River basin, Utah, Wyoming, and Idaho, by K. M. Waddell, U.S. Geological Survey, 1970.
- No. 19. Daily water-temperature records for Utah streams, 1944-68, by G. L. Whitaker, U. S. Geological Survey, 1970.
- No. 20. Water-quality data for the Flaming Gorge area, Utah and Wyoming, by R. J. Madison, U.S. Geological Survey, 1970.
- No. 21. Selected hydrologic data, Cache Valley, Utah and Idaho, by L. J. McGreevy and L. J. Bjorklund, U.S. Geological Survey, 1970.
- No. 22. Periodic water- and air-temperature records for Utah streams, 1966-70, by G. L. Whitaker, U.S. Geological Survey, 1971.

- No. 23. Selected hydrologic data, lower Bear River drainage basin, Box Elder County, Utah, by L. J. Bjorklund and L. J. McGreevy, U.S. Geological Survey, 1973.
- No. 24. Water-quality data for the Flaming Gorge Reservoir area, Utah and Wyoming, 1969-72, by E. L. Bolke and K. M. Waddell, U.S. Geological Survey, 1972.

INFORMATION BULLETINS

- *No. 1. Plan of work for the Sevier River Basin (Sec. 6, P. L. 566), U.S. Department of Agriculture, 1960.
- *No. 2. Water production from oil wells in Utah, by Jerry Tuttle, Utah State Engineer's Office, 1960.
- *No. 3. Ground-water areas and well logs, central Sevier Valley, Utah, by R. A. Young, U.S. Geological Survey, 1960.
- *No. 4. Ground-water investigations in Utah in 1960 and reports published by the U.S. Geological Survey or the Utah State Engineer prior to 1960, by H. D. Goode, U.S. Geological Survey, 1960.
- *No. 5. Developing ground water in the central Sevier Valley, Utah, by R. A. Young and C. H. Carpenter, U.S. Geological Survey, 1961.
- *No. 6. Work outline and report outline for Sevier River basin survey, (Sec. 6, P.L. 566), U.S. Department of Agriculture, 1961.
- No. 7. Relation of the deep and shallow artesian aquifers near Lynndyl, Utah, by R. W. Mower, U.S. Geological Survey, 1961.
- *No. 8. Projected 1975 municipal water-use requirements, Davis County, Utah, by Utah State Engineer's Office, 1962.
- No. 9. Projected 1975 municipal water-use requirements, Weber County, Utah, by Utah State Engineer's Office, 1962.
- *No. 10. Effects on the shallow artesian aquifer of withdrawing water from the deep artesian aquifer near Sugarville, Millard County, Utah, by R. W. Mower, U.S. Geological Survey, 1963.
- No. 11. Amendments to plan of work and work outline for the Sevier River basin (Sec. 6, P.L. 566), U.S. Department of Agriculture, 1964.
- *No. 12. Test drilling in the upper Sevier River drainage basin, Garfield and Piute Counties, Utah, by R. D. Feltis and G. B. Robinson, Jr., U.S. Geological Survey, 1963.

- *No. 13. Water requirements of lower Jordan River, Utah, by Karl Harris, Irrigation Engineer, Agricultural Research Service, Phoenix, Arizona, prepared under informal cooperation approved by Mr. William W. Donnan, Chief, Southwest Branch (Riverside, California) Soil and Water Conservation Research Division, Agricultural Research Service, U.S.D.A., and by Wayne D. Criddle, State Engineer, State of Utah, Salt Lake City, Utah, 1964.
- *No. 14. Consumptive use of water by native vegetation and irrigated crops in the Virgin River area of Utah, by Wayne D. Criddle, Jay M. Bagley, R. Keith Higginson, and David W. Hendricks, through cooperation of Utah Agricultural Experiment Station, Agricultural Research Service, Soil and Water Conservation Branch, Western Soil and Water Management Section, Utah Water and Power Board, and Utah State Engineer, Salt Lake City, Utah, 1964.
- *No. 15. Ground-water conditions and related water-administration problems in Cedar City Valley, Iron County, Utah, February, 1966, by Jack A. Barnett and Francis T. Mayo, Utah State Engineer's Office.
- *No. 16. Summary of water well drilling activities in Utah, 1960 through 1965, compiled by Utah State Engineer's Office, 1966.
- *No. 17. Bibliography of U.S. Geological Survey water-resources reports for Utah, compiled by Olive A. Keller, U.S. Geological Survey, 1966.
- *No. 18. The effect of pumping large-discharge wells on the ground-water reservoir in southern Utah Valley, Utah County, Utah, by R. M. Cordova and R. W. Mower, U.S. Geological Survey, 1967.
- No. 19. Ground-water hydrology of southern Cache Valley, Utah, by L. P. Beer, 1967.
- No. 20. Fluvial sediment in Utah, 1905-65, A data compilation by J. C. Mundorff, U.S. Geological Survey, 1968.
- No. 21. Hydrogeology of the eastern portion of the south slopes of the Uinta Mountains, Utah, by L. G. Moore and D. A. Barker, U.S. Bureau of Reclamation, and James D. Maxwell and Bob L. Bridges, Soil Conservation Service, 1971.
- No. 22. Bibliography of U.S. Geological Survey water-resources reports for Utah, compiled by Barbara A. LaPray, U.S. Geological Survey, 1972.